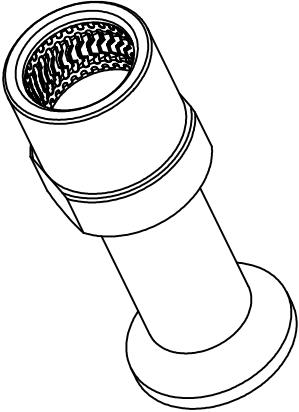
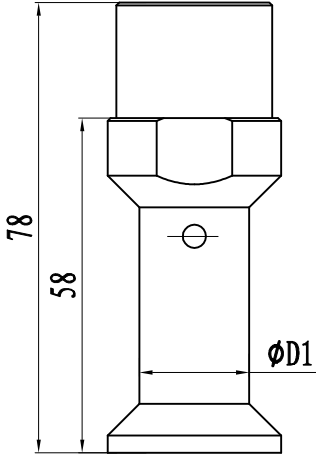
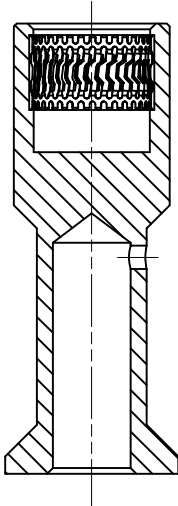


期/Date		案/		Filing Clerk		1		2		3		4		5		6	
A		B		C		D		   技术参数: - 材料: 铜合金 - 表面处理: 镀银 - 额定电流: 650A - 接触电阻: <0.3mΩ - 线径范围: 150mm² - 最大电缆直径: 27mm - 可插拔次数: >500 - 压力要求: 130kN Technical specification: - Material: copper alloy - Surface: hard-silver plated - Rated current: 650A - Contact resistance: <0.3mΩ - Wire gauge: 150mm² - Max. insulation diameter: 27mm - Mating cycles: >500 - Pressing force requirement: 130kN									
								产品名称/Part Name			产品料号/Part No.			D1			
								CHSF650-95G			1010301202002			19			
								CHSF650-120G			1010301202101			21			
CHSF650-150G			1010301202202			23.5											
标记 Mark		处数 Number		变更描述/Descriptions		签名 Signature		日期 Date		表面处理 Finish		-		图号 Drawing No.		-	
										材料 Material		-		产品代号 Part Code		CHSF650-150G	
										比例 Scale		1:1		产品料号 Part No.		1010301202202	
										版本 REV.		V1.1		产品名称 Part Name		-	
										重量 Weight		188.2g		数量 Qty.		-	
绘图 Drawn		SX. HUANG		日期/Date		19. 11. 20		标准化 Stand.				All Dimensions in mm Original Size DIN A4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD			
审核 Checked		HZ. LAN		19. 11. 20													
工艺 Process						批准 Approved		HQ. ZHANG 19. 11. 20									