


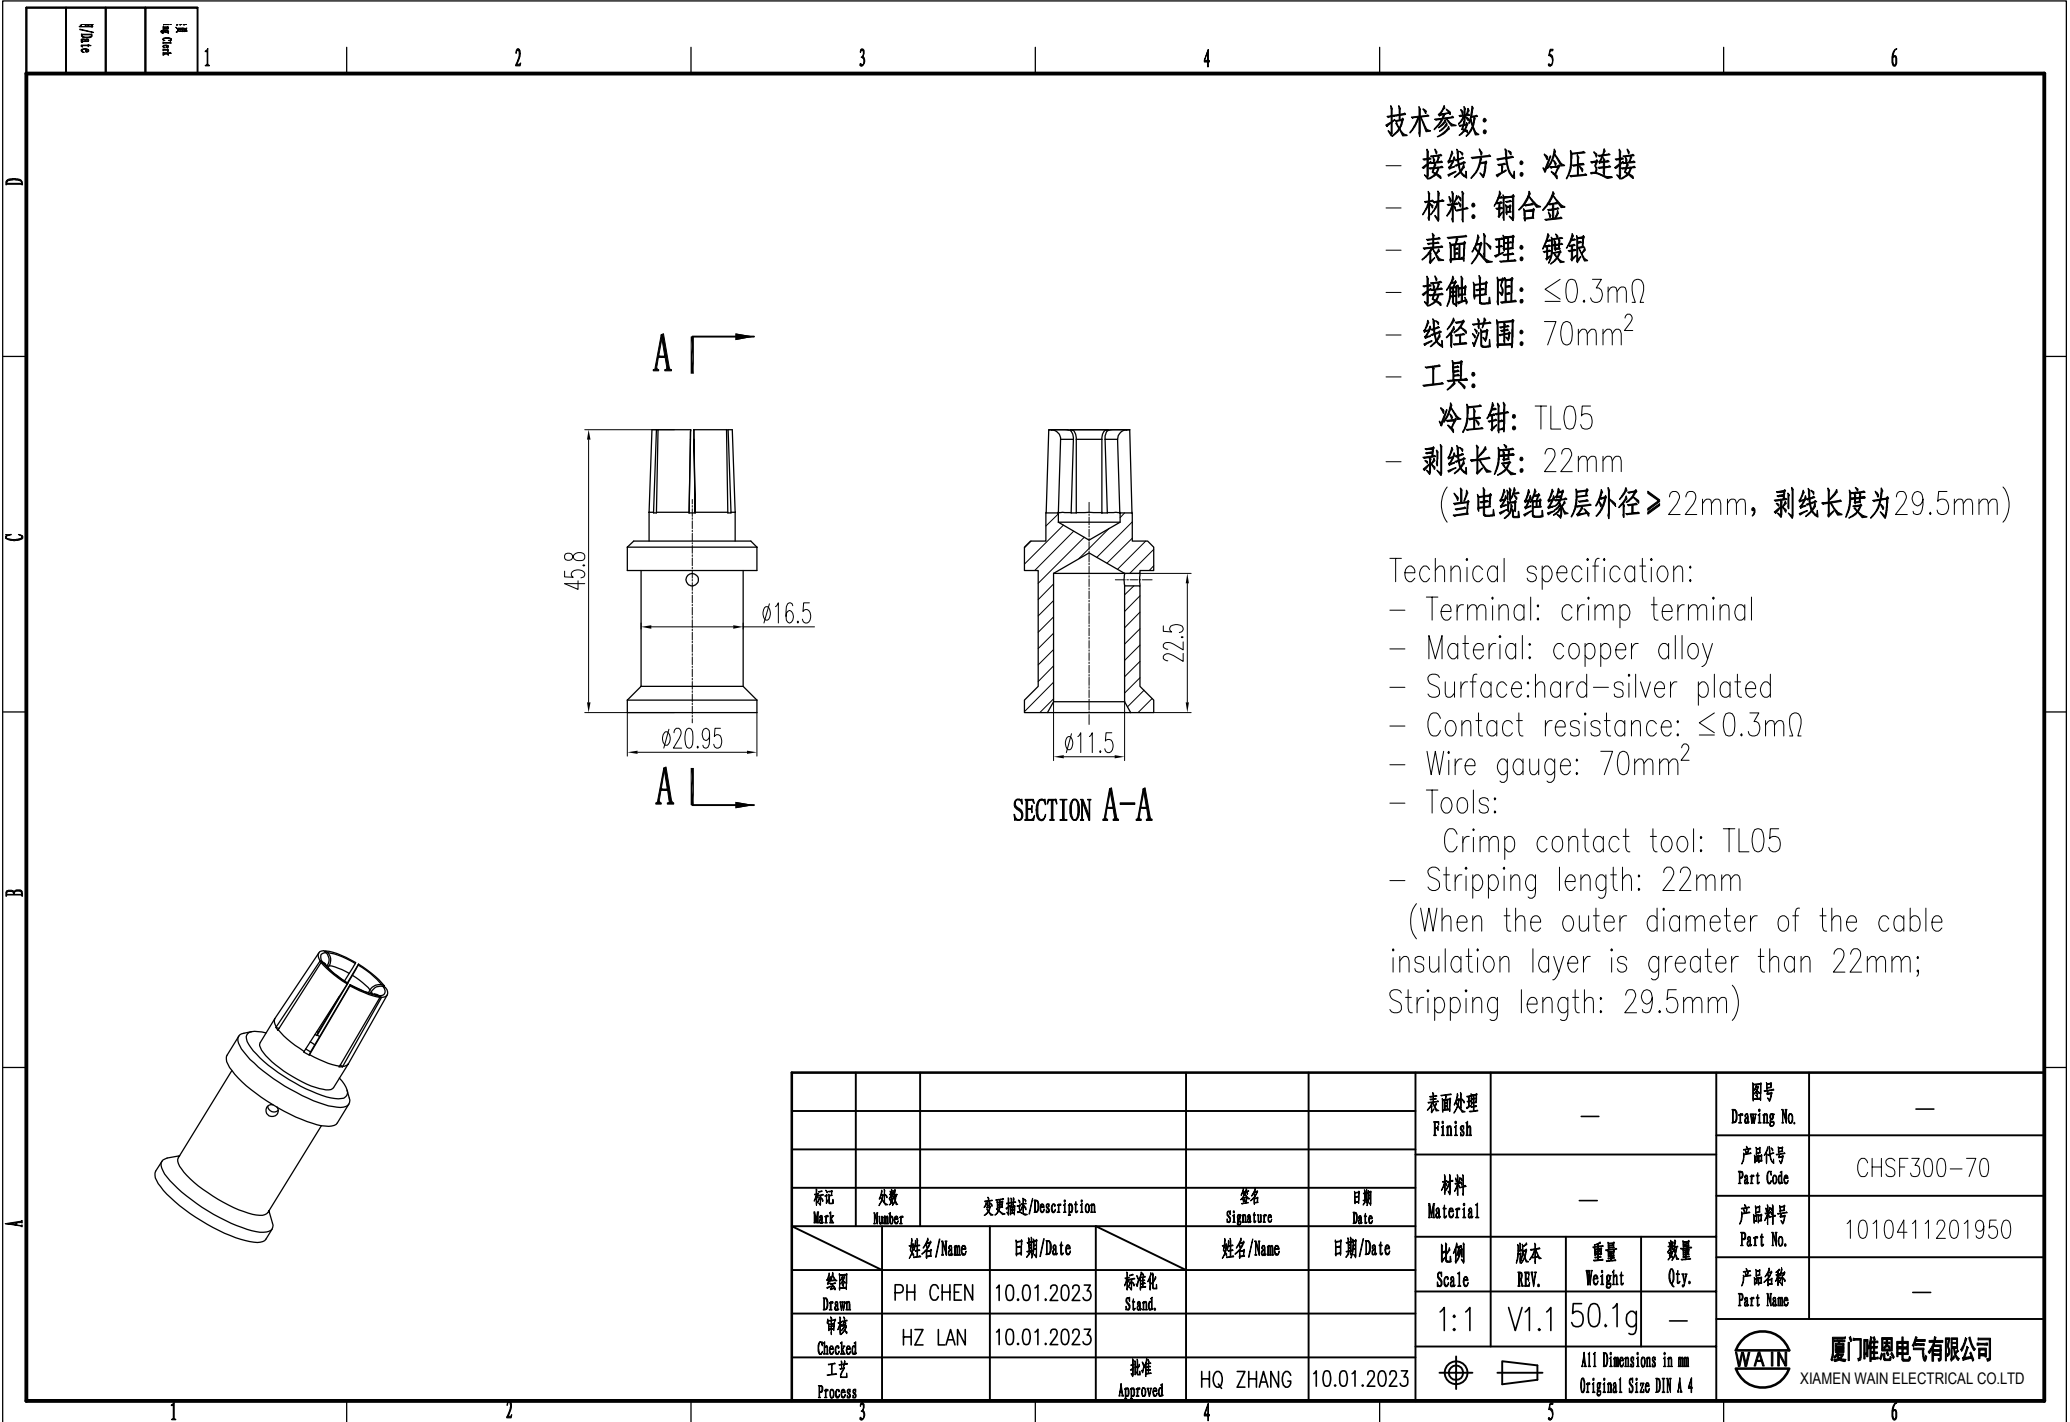

技术参数:

- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 0.3\text{m}\Omega$
- 线径范围: 70mm^2
- 工具:
 - 冷压钳: TL05
- 剥线长度: 22mm
(当电缆绝缘层外径 $\geq 22\text{mm}$, 剥线长度为29.5mm)

Technical specification:

- Terminal: crimp terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 0.3\text{m}\Omega$
- Wire gauge: 70mm^2
- Tools:
 - Crimp contact tool: TL05
- Stripping length: 22mm
(When the outer diameter of the cable insulation layer is greater than 22mm; Stripping length: 29.5mm)

						表面处理 Finish	—				图号 Drawing No.	—
						材料 Material	—				产品代号 Part Code	CHSF300-70
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date					产品料号 Part No.
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—	
绘图 Drawn	PH CHEN	10.01.2023	标准化 Stand.			1:1	V1.1	50.1g	—			
审核 Checked	HZ LAN	10.01.2023										
工艺 Process			批准 Approved	HQ ZHANG	10.01.2023			All Dimensions in mm Original Size DIN A 4			厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	