
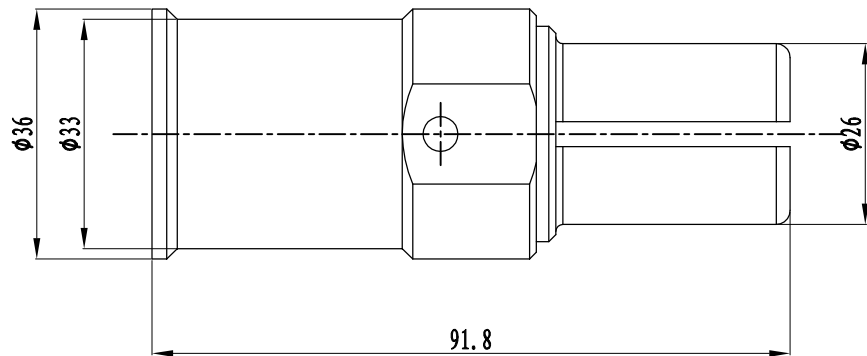


日期/Date
档案员
Filing Clerk





技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 1000A
- 接触电阻: $\leq 0.3\text{m}\Omega$
- 线径范围: 300mm^2
- 最大电缆直径: 38mm
- 可插拔次数: ≥ 500
- 压力要求: 130kN
- 剥线长度: 46mm

Technical specification:

- Material: copper alloy
- Surface: hard-silver plated
- Rated current: 1000A
- Contact resistance: $\leq 0.3\text{m}\Omega$
- Wire gauge: 300mm^2
- Max. insulation diameter: 38mm
- Mating cycles: ≥ 500
- Pressing force requirement: 130kN
- Stripping length: 46mm

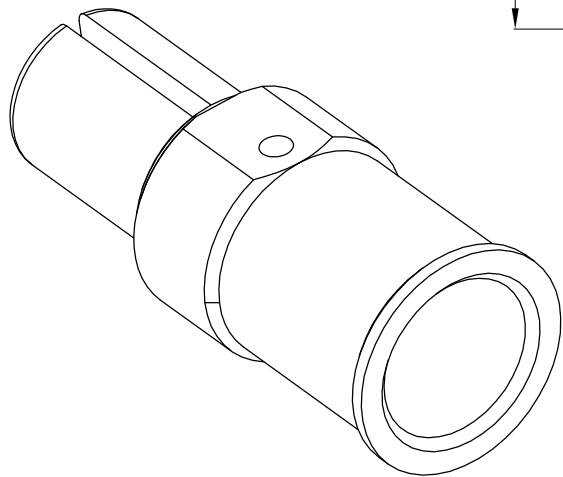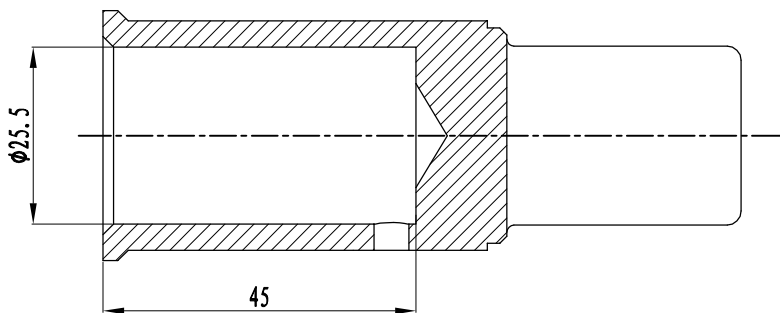

						表面处理 Finish	—	图号 Drawing No.	—
						材料 Material	—	产品代号 Part Code	CHSM1000-300
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date		产品料号 Part No.	1010421103551
绘图 Drawn	姓名/Name	TC YE	日期/Date	03.02.2023	姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight
审核 Checked	姓名/Name	HZ LAN	日期/Date	03.02.2023	姓名/Name	日期/Date	1:1	V1.1	数量 Qty.
工艺 Process	—	—	批准 Approved	HQ ZHANG	03.02.2023				
							比例 Scale	版本 REV.	重量 Weight
							1:1	V1.1	367.1g
							数量 Qty.	—	—
							All Dimensions in mm Original Size DIN A 4		
							厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		