


VIEW B

Technical requirements:

1. Wires, connectors and accessories shall not be scratched, bruised, dirty or greasy in the process of wiring harness processing;
2. Needle and thread are connected reliably and firmly;
3. Wire harness processing size and electrical parameters meet customer requirements;
4. Packaging requirements: firm, good packing, missing packing, mixed packing.

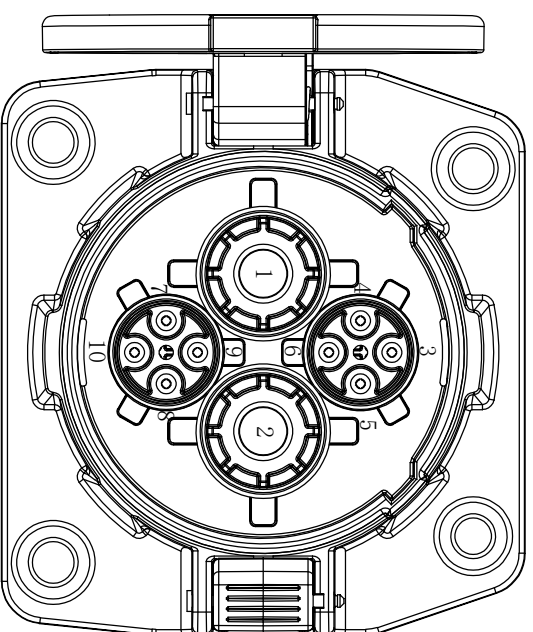

VIEW A

Insert core	Insert core	line color	linear	Number
CHADM-S	1	0	EV CABLE 40mm²	1
	2	0	EV CABLE 40mm²	2
	3	B	AESSX 0.75mm²	3
	4	R	AESSX 0.75mm²	4
	5	P	AESSX 0.75mm²	5
	6	G	AESSX 0.75mm²	6
	7	Y	AESSX 0.75mm²	7
	8	BL	AESSX 0.75mm²	8
	9	BR	AESSX 0.75mm²	9
	10	R/Y	AESSX 0.75mm²	10

18	Heat shrinkable tube	Ø19.1带胶热缩管	2PCS	MAIN
17	Heat shrinkable tube	Ø2.4透明热缩管	8PCS	MAIN
16	Card pin	CHADM-S-NC	1PCS	MAIN
15	pressing buckle	CHADM-S-BU	1PCS	MAIN
14	After the end cover	CHADM-S-RCC	1PCS	MAIN
13	charging base	CHADM-S-BK	1PCS	MAIN
12	Sealing ring	CHADM-S-Ø19.6	1PCS	MAIN
11	Plastic bags	CHADM-S-BTE	1PCS	MAIN
10	Insert core	QMSFH-40G	2PCS	MAIN
9	Insert core	QMSFH-0-75	8PCS	MAIN
8	Cable	EV CABLE 40mm ² 0	1.96m	2x0.96m
7	Cable	AESSX 0.75mm ² (19/0.23) R/Y	1m	
6	Cable	AESSX 0.75mm ² (19/0.23) BR	1m	
5	Cable	AESSX 0.75mm ² (19/0.23) BR	1m	
4	Cable	AESSX 0.75mm ² (19/0.23) G	1m	
3	Cable	AESSX 0.75mm ² (19/0.23) P	1m	
2	Cable	AESSX 0.75mm ² (19/0.23) R	1m	
1	Cable	AESSX 0.75mm ² (19/0.23) B	1m	TTCCABLE
NO	Type 类型	Parts Name 品名	QTY. 数量	Note 备注

变更描述/Description

RECOGNITION

CHECKED

DRAWN

TITLE

CHADM-S-S1.0机车充电器

unit of size

VERSION

SCALE

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

特

厦门唯恩电气有限公司
XIAMEN WAIN ELECTRICAL CO.LTD

图纸编号

CHADM-S-190808

perspective

DATE

SHEET

2019.08.08

1/1