

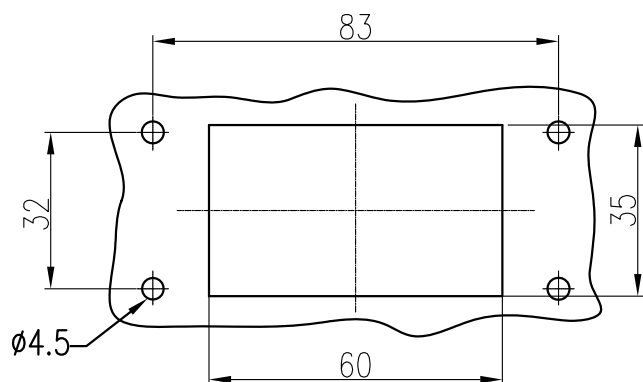




面板开孔图
Panel cut out

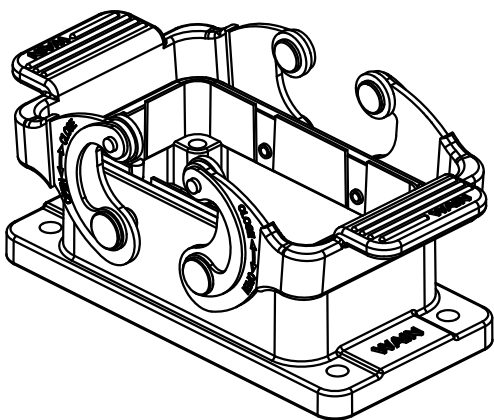

- 材料：压铸铝
- 表面处理：钝化
- 温度范围：-40℃ - +125℃
- 防护等级：IP67（联锁状态, IEC 60529）
- 联锁元件：
 - 锁扣方式：双扣
 - 材料：不锈钢+软胶
- 密封元件：NBR
- 出线方向：底部出线

- Material: aluminium die-cast
- Surface: passivating treatment
- Temperature range: -40°C - +125°C
- Degree of protection: IP67
(acc.to IEC 60529 for coupled connector)
- Cable entry: bottom entry
- Locking element:
 - Locking type: double locking latch
 - material: stainless steel+TPR
- Hoods/Housings sealing: NBR

					表面处理 Finish	—				图号 Drawing No.	—	
					材料 Material	—				产品代号 Part Code	EMC1.W10B-BK-2L/SC	
标记 Mark	处数 Number	变更描述/Description				签名 Signature	日期 Date	产品料号 Part No.				1111103411001
	姓名/Name	日期/Date			姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	SY JI	18.10.2017		标准化 Stand.	—	—	2:3	V1.1	136.8g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
审核 Checked	HZ LAN	18.10.2017										
工艺 Process	—	—		批准 Approved	YY LIN	18.10.2017	 		All Dimensions in mm Original Size DIN A 4			