
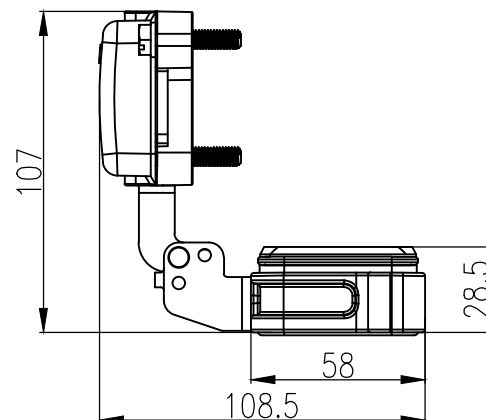
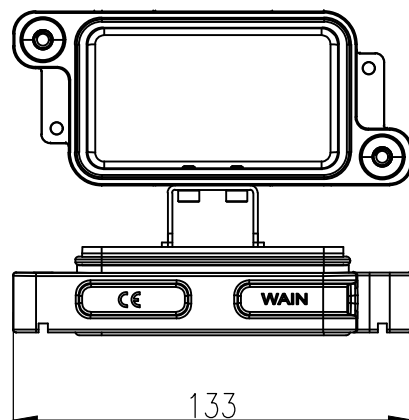


△ 配套HC650插芯使用时此开孔宽度为43mm
Match with insert HC650, the distance
between the two openings is 43mm,

面板开孔图 Note: $\triangle$ 配套额定电
Panel cut out 度为43mm,

若面板强度足够,能保证产品安装时,面板不会出现变形,适配其他规格的插芯时,该开孔宽度亦可采用43mm. match with inserts with rated current 650A(HC650-M, HC650-F, HC650-MC, HC650-FC), and the distance between the two openings is 43 mm. If the panel is strong enough to avoid distortion during assembly, the distance between the two openings still could be 43 mm, when the shell matchs with other inserts.

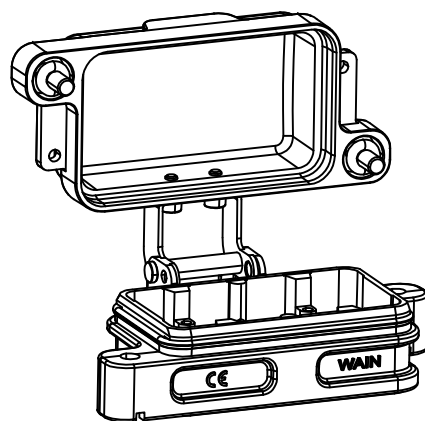

						表面处理 Finish	—				图号 Drawing No.	—		
						材料 Material	—				产品代号 Part Code	HP6B/H-BK-2H-MCV		
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date					产品料号 Part No.	1136063601001	
	姓名/Name	日期/Date		姓名/Name	日期/Date		比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—		
绘图 Drawn	JP HUANG	27.12.2023	标准化 Stand.	—	—	 	All Dimensions in mm Original Size DIN A 4				 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD			
审核 Checked	HZ LAN	27.12.2023			2:5							V1.2	250g	—
工艺 Process	—	—	批准 Approved	HQ ZHANG	27.12.2023									