
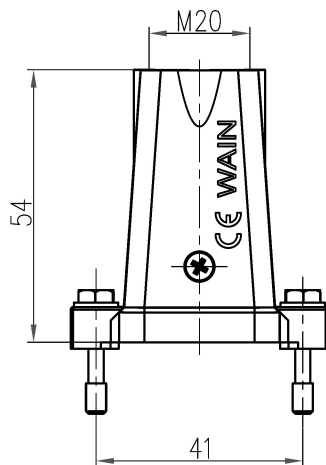



Note: Before installation, if there is a square seal ring on the used insert, the seal ring shall be removed before installation.

For more details, please contact us.

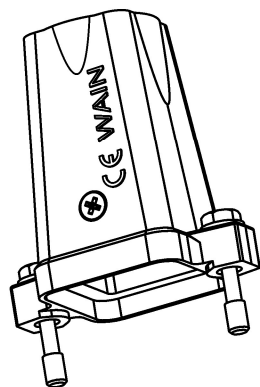

- 材料: 压铸铝
- 表面处理: 粉末喷涂
- 颜色: RAL 7037 (灰色)
- 温度范围: -40℃ - +125℃
- 防护等级: IP68/IP69K
- 出线方向: 顶出线
- 出线孔数: 1
- 螺纹规格: M20

- Material: aluminium die-cast
- Surface: powder-coated
- Colour: RAL 7037(grey)
- Temperature range: -40°C - $+125^{\circ}\text{C}$
- Degree of protection: IP68/IP69K
- Cable entry: top entry
- No. of cable entries: 1
- Thread size: M20

						表面处理 Finish		—		图号 Drawing No.	—
										产品代号 Part Code	HP 3A—TE—2S—M20
						材料 Material		—		产品料号 Part No.	1150034201002
标记 Mark	处数 Number	变更描述/Description			签名 Signature					日期 Date	产品名称 Part Name
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.		
绘图 Drawn	YL GAO	28.12.2022	标准化 Stand.	—	—	2: 3	V1.1	50g	—		
审核 Checked	Q GAO	28.12.2022				 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
工艺 Process	—	—	批准 Approved	HQ ZHANG	28.12.2022						