



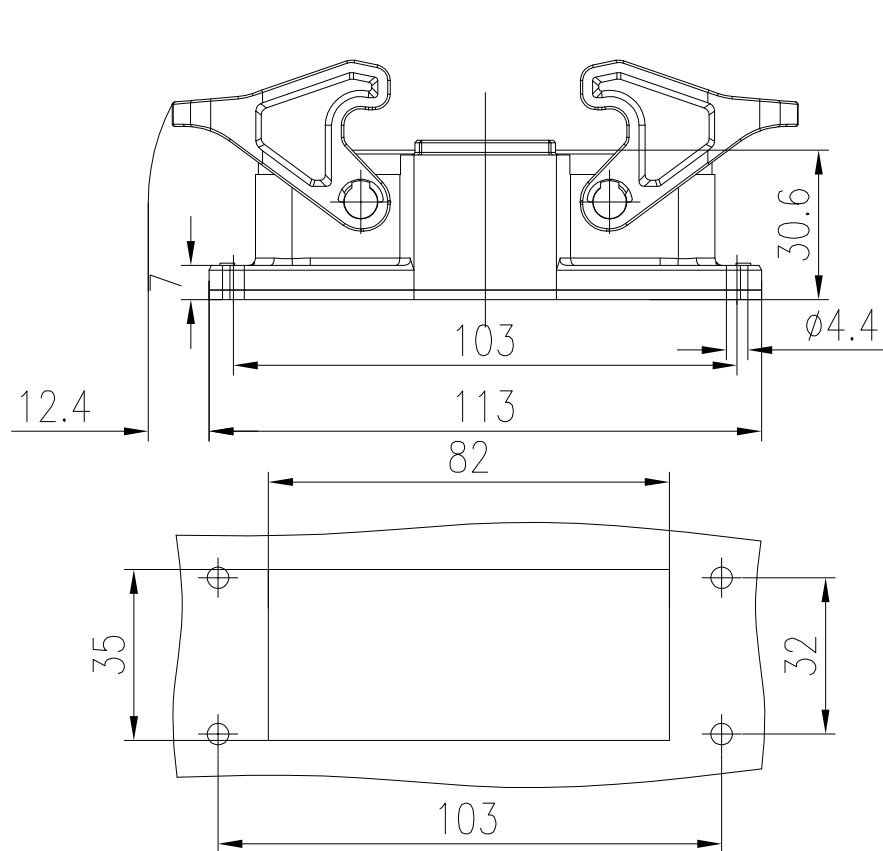

面板开孔图
Panel cut out

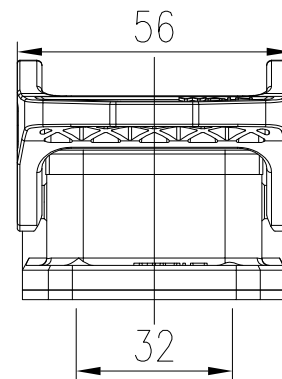


技术参数:

- 材料: 聚酰胺
- 颜色: RAL 9005 (黑色)
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 防护等级: IP65 (联锁状态, IEC 60529)
- 联锁元件:
 - 锁扣方式: 塑料双扣
 - 材料: 聚酰胺
- 密封元件: NBR
- 出线方向: 底部出线

Technical specification:

- Material: polyamide
- Colour: RAL 9005(black)
- Temperature range: -40°C - $+125^{\circ}\text{C}$
- Degree of protection: IP65
(acc.to IEC 60529 for coupled connector)
- Locking element:
 - Locking type: double locking latch
 - material: polyamide
- Hoods/Housings sealing: NBR
- Cable entry: bottom entry

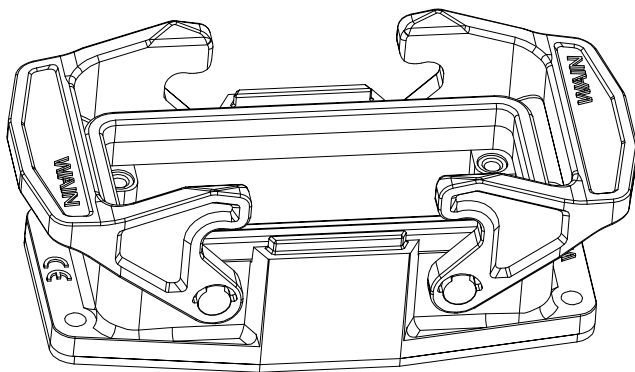

						表面处理 Finish		—		图号 Drawing No.		—			
						材料 Material	—				产品代号 Part Code		H16B.P-BK-2L		
变更描述/Description											签名 Signature		日期 Date		产品料号 Part No.
标记 Mark	处数 Number					姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name		—	
绘图 Drawn	YP ZHU	28.12.2023	标准化 Stand.			—	—	2:3	V1.1	100g	—				
审核 Checked	Q GAO	28.12.2023						2:3	V1.1	100g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD			
工艺 Process	—	—	批准 Approved		HQ ZHANG	28.12.2023	 								