

日期/Date

档案员  
Filing Clerk

1






2

3

4

5

6

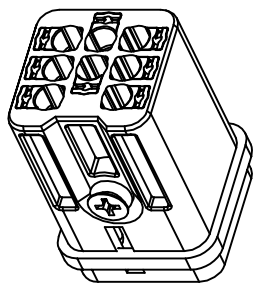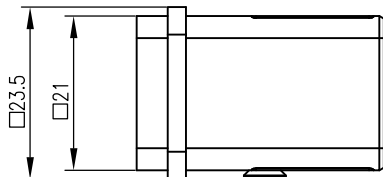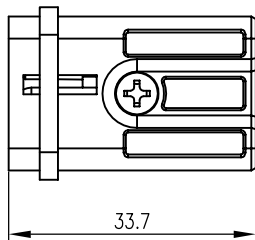

## 技术参数:

## 插芯:

- 插针数: 8
  - 额定电流: 10A
  - 额定电压: 50/~120V
  - 额定脉冲电压: 0.8kV
  - 污染等级: 3
  - 绝缘阻抗:  $> 10^{10}\Omega$
  - 材料: 聚碳酸酯
  - 颜色: RAL 7032 (浅灰色)
  - 温度范围:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
  - 依据UL 94的阻燃等级: V0
  - 可插拔次数:  $> 500$
- 插针:
- 接线方式: 弹片连接
  - 材料: 铜合金
  - 表面处理: 镀银
  - 接触电阻:  $< 3\text{m}\Omega$
  - 线径范围:  $0.5-2.5\text{mm}^2/20-14$  AWG
  - (带管形接线端子线径范围:  $0.14-1.5\text{mm}^2/26-16$  AWG)
  - 剥线长度:  $10\pm 0.5\text{mm}$

## Technical specification:

## Insters:

- No. of contact: 8
- Rated current: 10A
- Rated voltage: 50/~120V
- Rated impulse voltage: 4kV
- Pollution degree: 3
- Insulation resistance:  $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles:  $\geq 500$

## Contacts:

- Terminal: spring terminal
- Material: copper alloy
- Surface: Hard-silver plated
- Contact resistance:  $\leq 3\text{m}\Omega$
- Wire gauge:  $0.5-2.5\text{mm}^2/20-14$  AWG
- (For wires with crimped ferrule, wire gauge:  $0.14-1.5\text{mm}^2/26-16$  AWG)
- Stripping length:  $10\pm 0.5\text{mm}$

						表面处理 Finish		-		图号 Drawing No.		-		
						材料 Material		-		产品代号 Part Code		HD-008-MQ		
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date					产品料号 Part No.		1250080010001	
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name		-		
绘图 Drawn	YL GAO	12.12.2023	标准化 Stand.	-	-	1:1	V1.1	-	-					
审核 Checked	Q GAO	12.12.2023												
工艺 Process	-	-	批准 Approved	HQ ZHANG	12.12.2023			All Dimensions in mm Original Size DIN A 4				<b>厦门唯恩电气有限公司</b> <b>XIAMEN WAIN ELECTRICAL CO.,LTD</b>		

1

2

3

4

5

6