


技术参数:

- 插芯:
- 插针数: 64+PE
 - 额定电流: 10A
 - 额定电压: 250V
 - 额定脉冲电压: 4kV
 - 污染等级: 3
 - 依据UL/CSA的额定电压: 600V
 - 绝缘阻抗: $>10^{10}\Omega$
 - 材料: 聚碳酸酯
 - 颜色: RAL 7032 (浅灰色)
 - 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - 依据UL 94的阻燃等级: V0
 - 可插拔次数: >500
- 插针:
- 接线方式: 螺钉连接
 - 材料: 铜合金
 - 表面处理:
 - 接合侧: 镀银
 - 接线侧: 镀锡
 - 接触电阻: $\leq 10\text{m}\Omega$
 - 线径范围: $0.2-2.5\text{mm}^2(24-14 \text{ AWG})$
 - 拧紧/检测力矩: 0.5Nm
 - 剥线长度: 8-11mm

Technical specification:

- Insters:
- No. of contact: 64+PE
 - Rated current: 10A
 - Rated voltage: 250V
 - Rated impulse voltage: 4kV
 - Pollution degree: 3
 - Rated voltage acc.to UL/CSA: 600V
 - Insulation resistance: $\geq 10^{10}\Omega$
 - Material: polycarbonate
 - Colour: RAL 7032(light grey)
 - Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - Flammability acc.to UL 94: V0
 - Mating cycles: ≥ 500
- Contacts:
- Terminal: screw connection
 - Material: copper alloy
 - Surface:
 - mating side: hard-silver plated
 - termination side: tin plated
 - Contact resistance: $\leq 10\text{m}\Omega$
 - Wire gauge: $0.2-2.5\text{mm}^2(24-14 \text{ AWG})$
 - Tightening/test torque: 0.5Nm
 - Stripping length: 8-11mm

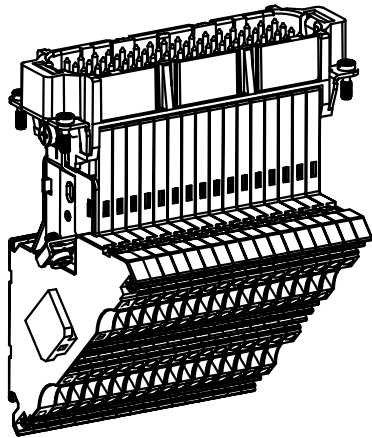

					表面处理 Finish	-			图号 Drawing No.	-
					材料 Material	-			产品代号 Part Code	HD-064-M.AV.R
标记 Mark	处数 Number	变更描述/Description		签名 Signature	日期 Date				产品料号 Part No.	1250640110102
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name
绘图 Drawn	YL GAO	04.12.2023	标准化 Stand.	-	-	1:2	V1.1	515g	-	-
审核 Checked	Q GAO	04.12.2023								
工艺 Process	-	-	批准 Approved	HQ ZHANG	04.12.2023	All Dimensions in mm Original Size DIN A 4			厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	