



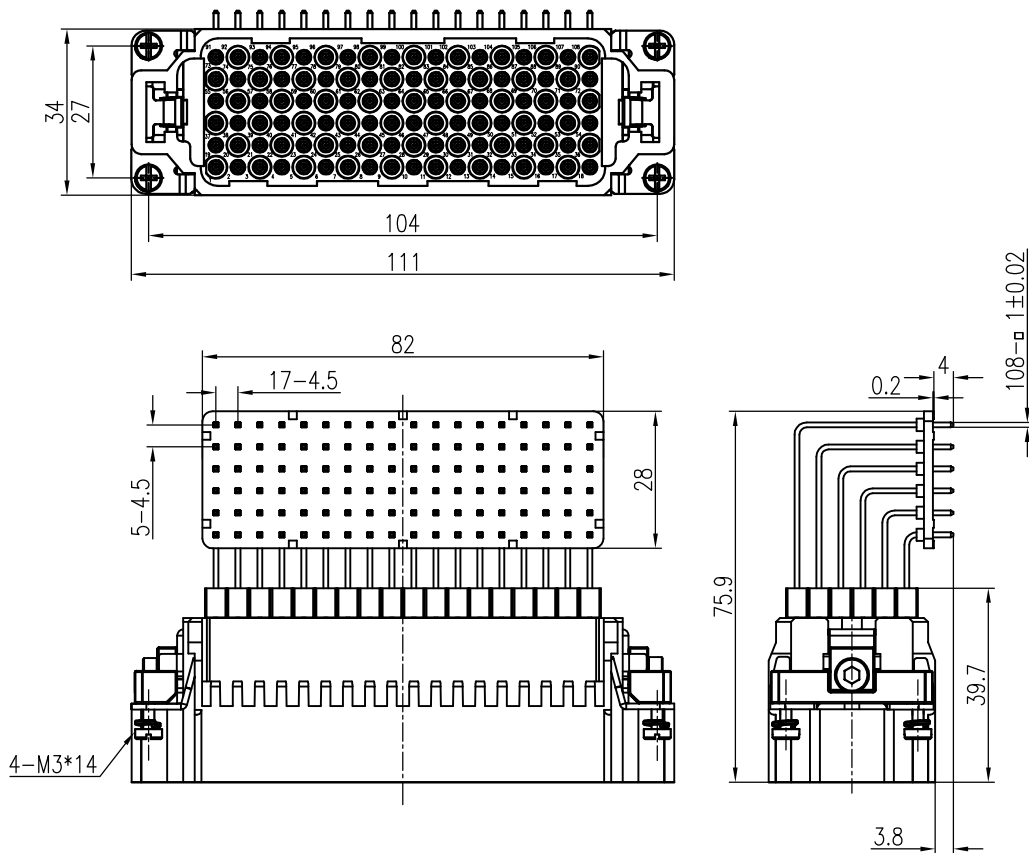

- 技术参数:
插芯:
- 插针数: 108
- 额定电流: 7.5A
- 额定电压: 200V
- 额定脉冲电压: 4kV
- 污染等级: 3
- 污染等级为2时的参数: 7.5A 320V 4kV 2
- 污染等级为1时的参数: 7.5A 1000V 4kV 1
- 绝缘阻抗: $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: >500
插针:
- 接线方式: 焊接连接
- 材料: 铜合金
- 表面处理:
 · 接触端镀银
 · 焊接端镀锡
- 接触电阻: $\leq 15\text{m}\Omega$
- PIN针间距: $4.5 \times 4.5\text{mm}$
- Technical specification:
Insters:
- No. of contact: 108
- Rated current: 7.5A
- Rated voltage: 200V
- Rated impulse voltage: 4kV
- Pollution degree: 3
- Pollution degree 2: 7.5A 320V 4kV 2
- Pollution degree 1: 7.5A 1000V 4kV 1
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500
Contacts:
- Terminal: soldering
- Material: copper alloy
- Surface:
 · Contact silver plated
 · terminal tin plated
- Contact resistance: $\leq 15\text{m}\Omega$
- PIN needle spacing: $4.5 \times 4.5\text{mm}$

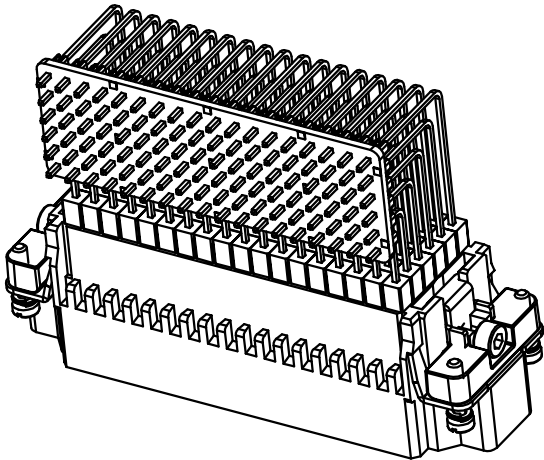

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	HDD-108-MSHT
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	1261080131001
		姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name
绘图 Drawn	YL GAO	12.12.2023	标准化 Stand.		—	—	2:3	V1.1	348.8g	—	—
审核 Checked	Q GAO	12.12.2023									
工艺 Process	—	—	批准 Approved	HQ ZHANG	12.12.2023			All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD	