
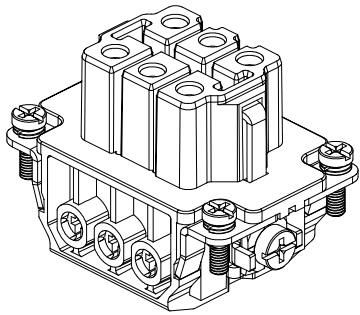
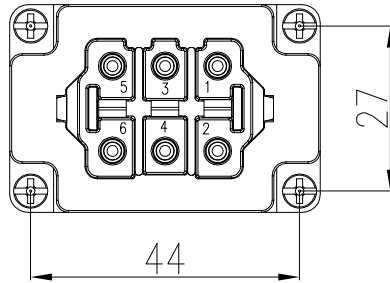





技术参数:

插芯:

- 插针数: 6+PE
- 1-2,3-4,5-6三组防开路
- 额定电流: 40A
- 额定电压: 500V
- 额定脉冲电压: 6kV
- 污染等级: 3
- 绝缘阻抗: $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: >500

插针:

- 接线方式: 螺钉连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 5\text{m}\Omega$
- 线径范围: $1.5-6\text{mm}^2$ (16-10 AWG)
- 拧紧/检测力矩: $0.8\text{N}\cdot\text{m}$
- 剥线长度: 10mm

匹配高压或塑料外壳。

Technical specification:

Inserts:

- No. of contact: 6+PE
- 1-2,3-4,5-6
Three Groups of Preventive Opening
- Rated current: 40A
- Rated voltage: 500V
- Rated impulse voltage: 8kV
- Pollution degree: 3
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500

Contacts:

- Terminal: screw terminal
 - Material: copper alloy
 - Surface: hard-silver plated
 - Contact resistance: $\leq 5\text{m}\Omega$
 - Wire gauge: $1.5-6\text{mm}^2$ (16-10 AWG)
 - Tightening/Test torque: $0.8\text{N}\cdot\text{m}$
 - Stripping length: 10mm
- Matching with high voltage or plastic shells.

						表面处理 Finish	—				图号 Drawing No.	—
						材料 Material	—				产品代号 Part Code	HSC-006-F
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date					产品料号 Part No.
		姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	SY	JL	17.08.2021	标准化 Stand.	—	—	1:1	V1.2	76g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO., LTD	
审核 Checked	HZ	LAN	17.08.2021									
工艺 Process	—	—	—	批准 Approved	HQ ZHANG	17.08.2021			All Dimensions in mm Original Size DIN A 4			