

- 技术参数:

插芯:

 - 插针数: 12/0+PE
 - 额定电流: 40A
 - 额定电压: 690V
 - 额定脉冲电压: 8kV
 - 污染等级: 3
 - 依据UL/CSA的额定电压: 600V/300V
 - 绝缘阻抗: $>10^{10}\Omega$
 - 材料: 聚碳酸酯
 - 颜色: RAL 7032 (浅灰色)
 - 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - 依据UL 94的阻燃等级: V0
 - 可插拔次数: >5000

插针:

 - 接线方式: 冷压连接
 - 材料: 铜合金
 - 表面处理: 镀金
 - 接触电阻: $\leq 0.3\text{m}\Omega$
 - 线径范围: $1.5-6\text{mm}^2(16-10\text{ AWG})$

工具:

 - 冷压钳:
 - TL02-0G($1.5-6\text{mm}^2$)
 - TL02-3G($4/6/10\text{mm}^2$)
 - 退针器: TL06G
- Technical specification:

Insters:


 - No. of contact: 12/0+PE
 - Rated current: 40A
 - Rated voltage: 690V
 - Rated impulse voltage: 8kV
 - Pollution degree: 3
 - Rated voltage acc.to UL/CSA: 600V/300V
 - Insulation resistance: $\geq 10^{10}\Omega$
 - Material: polycarbonate
 - Colour: RAL 7032(light grey)
 - Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - Flammability acc.to UL 94: V0
 - Mating cycles: ≥ 5000

Contacts:

 - Terminal: crimp terminal
 - Material: copper alloy
 - Surface: hard-gold plated
 - Contact resistance: $\leq 0.3\text{m}\Omega$
 - Wire gauge: $1.5-6\text{mm}^2(16-10\text{ AWG})$

Tools:

 - Crimp contact tool:
 - TL02-0G($1.5-6\text{mm}^2$)
 - TL02-3G($4/6/10\text{mm}^2$)
 - Contact removal tool: TL06G

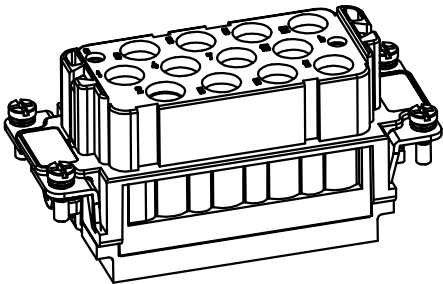

						表面处理 Finish	—				图号 Drawing No.	—
											材料 Material	—
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date						
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—	
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	—	—	2:3	V1.0	83.9g	—			
审核 Checked	P RAO	18.10.2010										
工艺 Process	—	—	批准 Approved	YY LIN	18.10.2010	 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		