
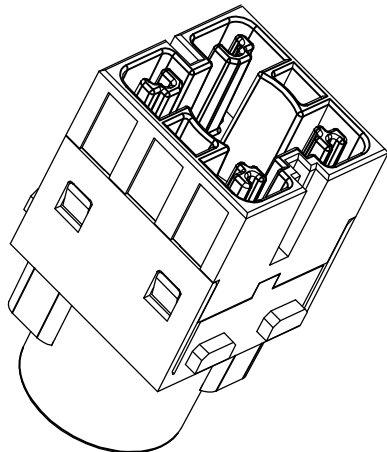
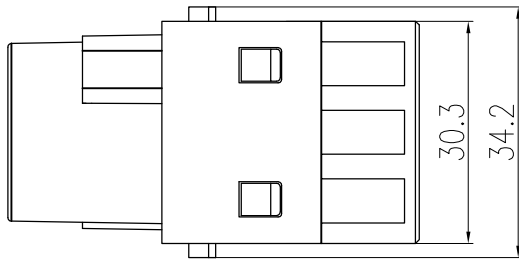
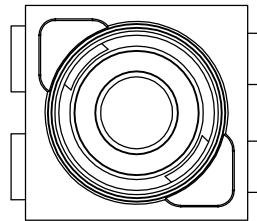
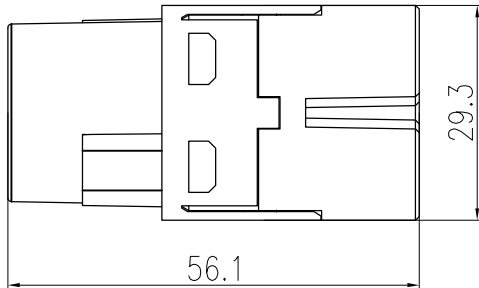


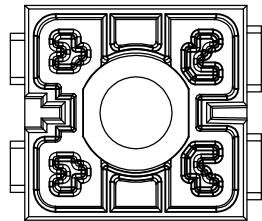

技术参数:

插芯:

- 插针数: 1
- 额定电流: 300A
- 额定电压:
 - 1000V AC
 - 1300V DC
- 额定脉冲电压: 8kV
- 污染等级: 3
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500

插针:

- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 0.3\text{m}\Omega$
- 线径范围: 70-120mm²
- 工具:
 - 冷压钳: TL05
- 剥线长度: 23.5mm
(当电缆绝缘层外径 $\geq 22\text{mm}$,
剥线长度为31mm)

Technical specification:

Insters:

- No. of contact: 1
- Rated current: 300A
- Rated voltage:
 - 1000V AC
 - 1300V DC
- Rated impulse voltage: 8kV
- Pollution degree: 3
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500

Contacts:

- Terminal: crimp terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 0.3\text{m}\Omega$
- Wire gauge: 70-120mm²
- Tools:
 - Crimp contact tool: TL05
- Stripping length: 23.5mm
(When the outer diameter of the cable
insulation layer is greater than 22mm;
Stripping length: 31mm)

						表面处理 Finish	—				图号 Drawing No.	—		
						材料 Material	—				产品代号 Part Code	H2MK300-001-MC		
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date					产品料号 Part No.	1290010100510	
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name				
绘图 Drawn	PH CHEN	10.01.2023	标准化 Stand.	—	—	1:1	V1.0	24.6g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD				
审核 Checked	HZ LAN	10.01.2023												
工艺 Process	—	—	批准 Approved	HQ ZHANG	10.01.2023									
								All Dimensions in mm Original Size DIN A 4						