

日期/Date

图样员
Filing Clerk

1



2

3

4

5

6

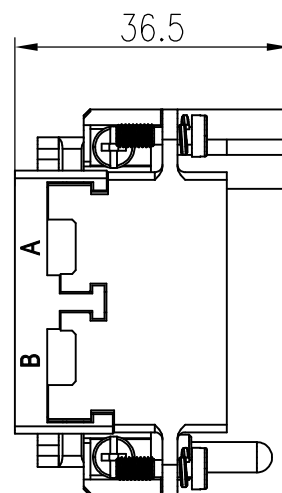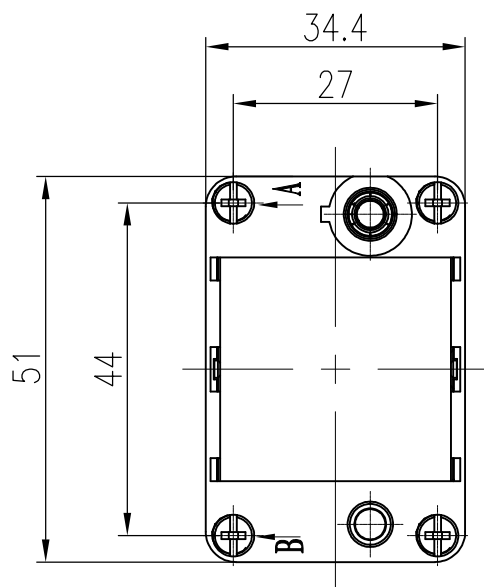


技术参数:

- 模块数量: 2
- 接地线:
 - 功率线: 4-10mm²(12-8 AWG)
 - 信号线: 1-2.5mm²(18-14 AWG)
- 材料: 压铸铝
- 温度范围: -40℃ - +125℃
- 可插拔次数: ≥500

Technical specification:

- No. of module: 2
- Wire gauge(PE contact):
 - Power side: 4-10mm²(12-8 AWG)
 - Signal side: 1-2.5mm²(18-14 AWG)
- Material: zinc die-cast
- Temperature range: -40℃ - +125℃
- Mating cycles: ≥500

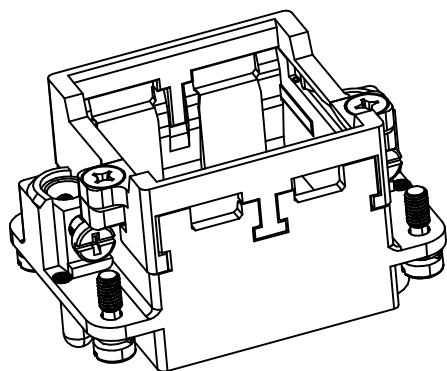

						表面处理 Finish	—	图号 Drawing No.	—
						材料 Material	—	产品代号 Part Code	HF6B-NUA3
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date		产品料号 Part No.	1290060001004
		姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight
绘图 Drawn		ZL CHEN	14.01.2019	标准化 Stand.	—	—	1:1	V1.2	数量 Qty.
审核 Checked		P RAO	14.01.2019						—
工艺 Process		—	—	批准 Approved	HQ ZHANG	14.01.2019			
							⌀	≡	All Dimensions in mm Original Size DIN A 4
							WAIN 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		

1

2

3

4

5

6