





日期/Date  
 档案员  
 Filing Clerk

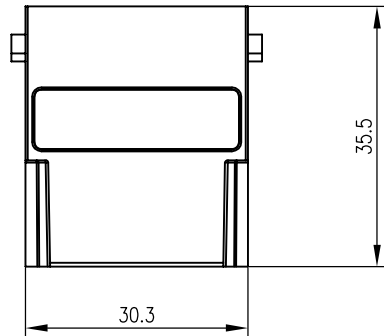

技术参数:

插芯:

- 插针数: 12
- 额定电流: 10A
- 额定电压: 250V
- 额定脉冲电压: 4kV
- 污染等级: 3
- 绝缘阻抗:  $> 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数:  $> 500$

插针:

- 接线方式: 弹片连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻:  $\leq 3\text{m}\Omega$
- 线径范围:  $0.14-2.5\text{mm}^2/26-14$  AWG
- (带管形接线端子线径范围:  $0.14-1.5\text{mm}^2/26-16$  AWG)
- 剥线长度: 10.0mm

Technical specification:

Inserts:

- No. of contact: 12
- Rated current: 10A
- Rated voltage: 250V
- Rated impulse voltage: 4kV
- Pollution degree: 3
- Insulation resistance:  $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032 (light grey)
- Temperature range:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles:  $\geq 500$

Contacts:

- Terminal: spring terminal
- Material: copper alloy
- Surface: Hard-silver plated
- Contact resistance:  $\leq 3\text{m}\Omega$
- Wire gauge:  $0.14-2.5\text{mm}^2/26-14$  AWG
- (For wires with crimped ferrule, wire gauge:  $0.14-1.5\text{mm}^2/26-16$  AWG)
- Stripping length: 10.0mm

				表面处理 Finish		-		图号 Drawing No.		-	
				材料 Material		-		产品代号 Part Code		HMD-012-MQ	
标记 Mark	处数 Number	变更描述/Description		签名 Signature	日期 Date			产品料号 Part No.		1290120010001	
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	
绘图 Drawn	TC YE	04.10.2023	标准化 Stand.	-	-	1:1	V2.0	21.1g	-	-	
审核 Checked	HZ LAN	04.10.2023								-	
工艺 Process	-	-	批准 Approved	HQ ZHANG	04.10.2023	All Dimensions in mm Original Size DIN A 4		厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD			