
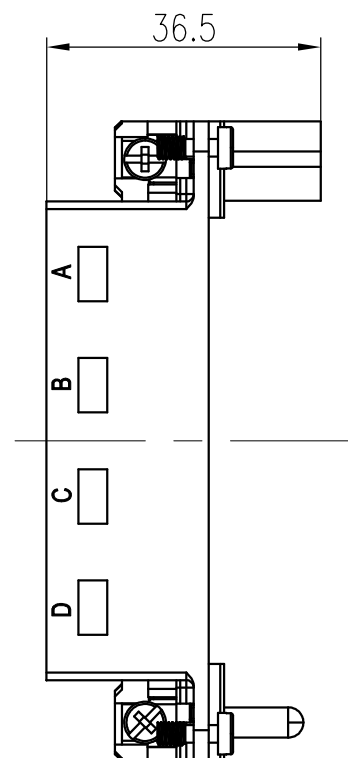
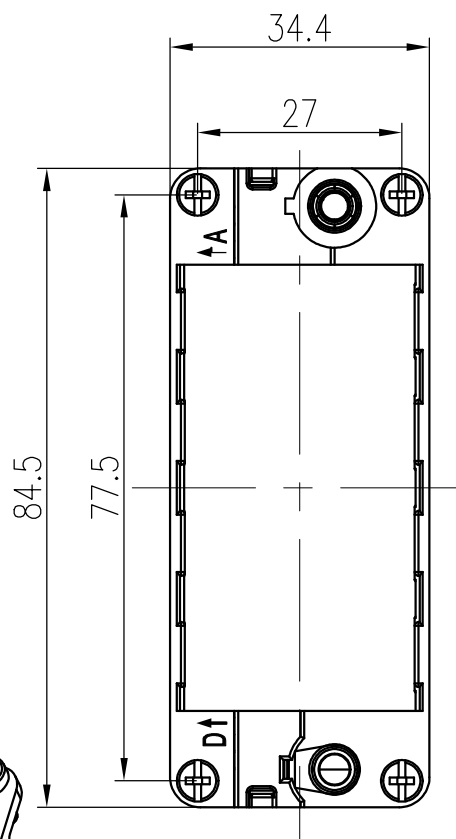


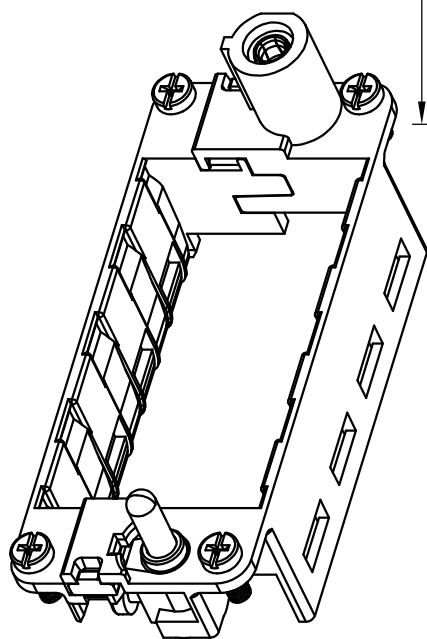

技术参数:

- 模块数量: 4
- 接地线:
 - 功率线: $4-10\text{mm}^2$ (12-8 AWG)
 - 信号线: $1-2.5\text{mm}^2$ (18-14 AWG)
- 材料: 压铸锌
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 可插拔次数: ≥ 500

Technical specification:

- No. of module: 4
- Wire gauge(PE contact):
 - Power side: 4-10mm²(12-8 AWG)
 - Signal side: 1-2.5mm²(18-14 AWG)
- Material: zinc die-cast
- Temperature range: -40℃ - +125℃
- Mating cycles: ≥500

					表面处理 Finish	—				图号 Drawing No.	—
					材料 Material	—				产品代号 Part Code	HF16B—NUA2
标记 Mark	处数 Number	变更描述/Description		签名 Signature						日期 Date	产品料号 Part No.
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	ZL CHEN	12.01.2019	标准化 Stand.	—	—	1:1	V1.2	64g	—		
审核 Checked	P RAO	12.01.2019									
工艺 Process	—	—	批准 Approved	HQ ZHANG	12.01.2019	  All Dimensions in mm Original Size DIN A 4				 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	