


日期/Date


绘图员
Drawing Clerk

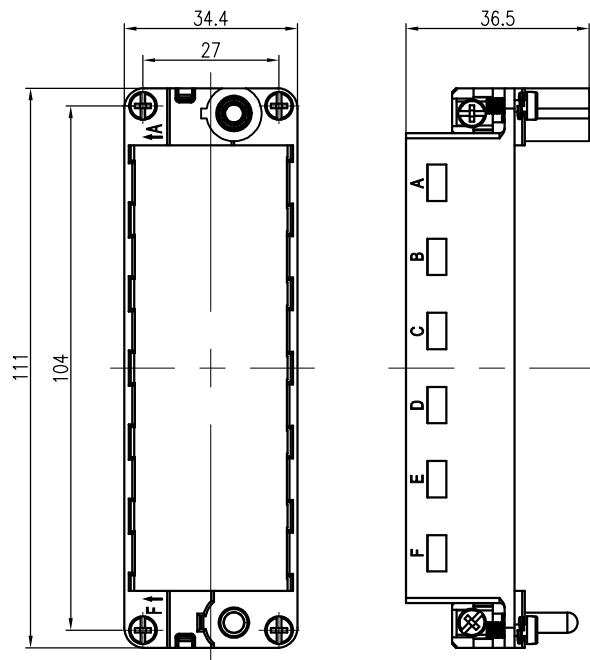


技术参数:

- 模块数量: 6
- 接地线:
 - 功率线: 4-10mm²(12-8 AWG)
 - 信号线: 1-2.5mm²(18-14 AWG)
- 材料: 压铸锌
- 温度范围: -40℃ - +125℃
- 可插拔次数: >500

Technical specification:

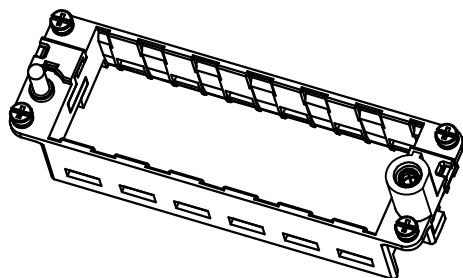- No. of module: 6
- Wire gauge(PE contact):
 - Power side: 4-10mm²(12-8 AWG)
 - Signal side: 1-2.5mm²(18-14 AWG)
- Material: zinc die-cast
- Temperature range: -40℃ - +125℃
- Mating cycles: >500



					表面处理 Finish	-			图号 Drawing No.	-	
					材料 Material	-			产品代号 Part Code	HF24B-NUA2	
标记 Mark	处数 Number	变更描述/Description		姓名 Signature	日期 Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.	1290240001002
		姓名/Name	日期/Date	姓名/Name	日期/Date					产品名称 Part Name	-
绘图 Drawn	ZL CHEN	12.01.2019	标准化 Stand.	-	-	2:3	V1.2	78g	-	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
审核 Checked	P RAO	12.01.2019									
工艺 Process	-	-	批准 Approved	HQ ZHANG	12.01.2019	  All Dimensions in mm Original Size DIN A 4					