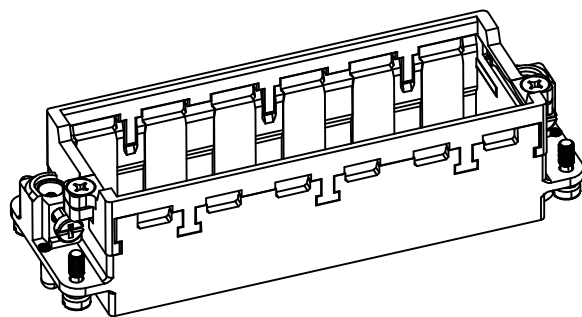
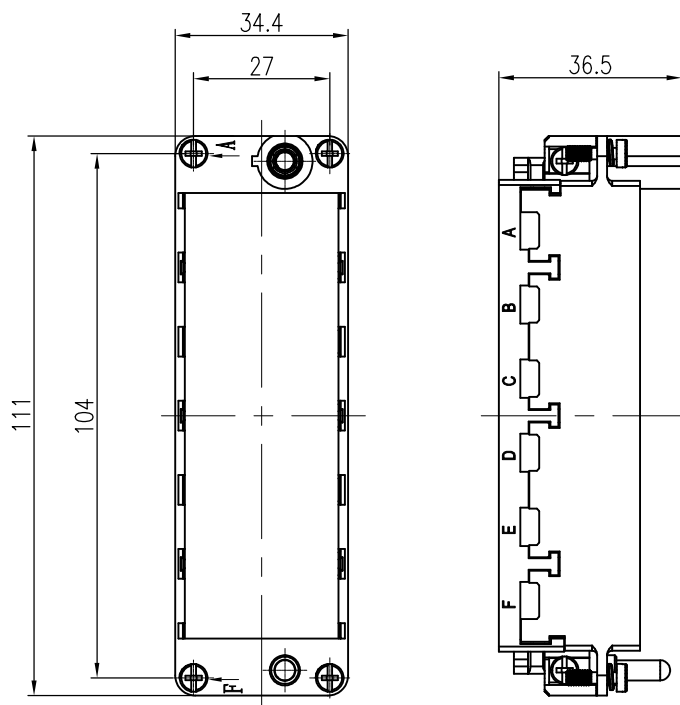


日期/Date

 档案员  
 Filing Clerk

**技术参数:**

- 模块数量: 6
- 接地线:
  - 功率线: 4-10mm<sup>2</sup>(12-8 AWG)
  - 信号线: 1-2.5mm<sup>2</sup>(18-14 AWG)
- 材料: 压铸锌
- 温度范围: -40℃ - +125℃
- 可插拔次数: >500

**Technical specification:**

- No. of module: 6
- Wire gauge(PE contact):
  - Power side: 4-10mm<sup>2</sup>(12-8 AWG)
  - Signal side: 1-2.5mm<sup>2</sup>(18-14 AWG)
- Material: zinc die-cast
- Temperature range: -40℃ - +125℃
- Mating cycles: >500

					表面处理 Finish	-			图号 Drawing No.	-	
					材料 Material	-			产品代号 Part Code	HF24B-NUA3	
标记 Mark	处数 Number	变更描述/Description		姓名 Signature	日期 Date				产品料号 Part No.	1290240001004	
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	-
绘图 Drawn	ZL CHEN	12.01.2019	标准化 Stand.	-	-	2:3	V1.2	100g	-		
审核 Checked	P RAO	12.01.2019									
工艺 Process	-	-	批准 Approved	HQ ZHANG	12.01.2019			All Dimensions in mm Original Size DIN A 4		<b>厦门唯恩电气有限公司</b> XIAMEN WAIN ELECTRICAL CO.LTD	