
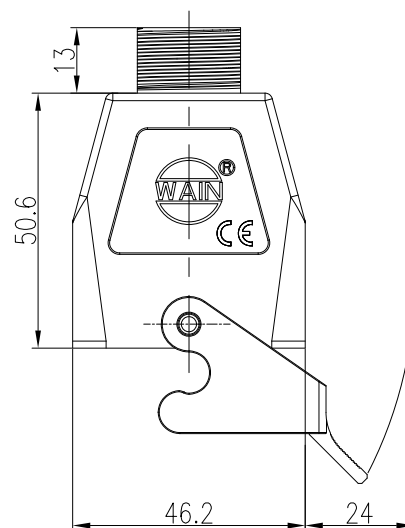
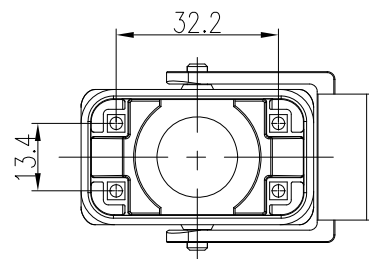
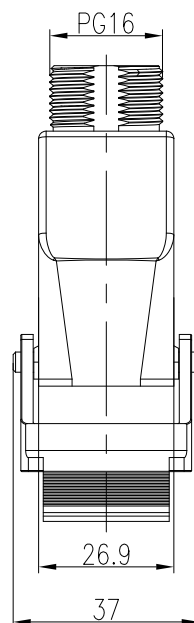


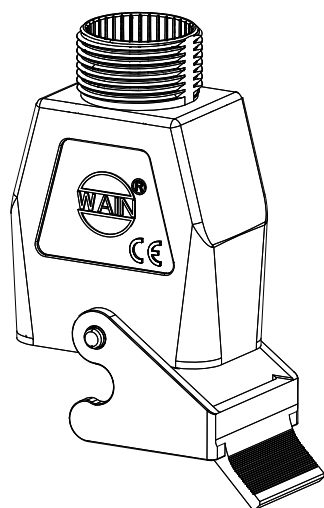

技术参数:

— 材料:

下壳：聚碳酸酯

锁扣：尼龙

— 表面处理: —

— 颜色: RAL 9005 (黑色)

— 温度范围: -40°C — $+125^{\circ}\text{C}$

— 防护等级: IP65 (联锁状态, IEC 60529)

— 出线方向: 顶出线

— 出线孔数: 1

— 螺纹规格: PG16

Technical specification:

- Material:

housing:polycarbonate

locking:Polyamide

– Surface: –

- Colour: RAL 9005(black)

- Temperature range: -40°C - +125°C

- Degree of protection: IP65

(acc.to IEC 60529 for coupled connector)

- Cable entry: top entry

- No. of cable entries: 1

- Thread size: PG16

						表面处理 Finish		—		图号 Drawing No.		—
						材料 Material		—		产品代号 Part Code		HC.P-CCT-1L-PG16
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date					产品料号 Part No.	1300087271010
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name		—
绘图 Drawn	WL KANG	2017.2.16	标准化 Stand.	—	—	2:3	V1.1	30.6g	—			
审核 Checked	ZW WU	2017.2.16										
工艺 Process	—	—	批准 Approved	YY LUO	2017.2.16	 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		