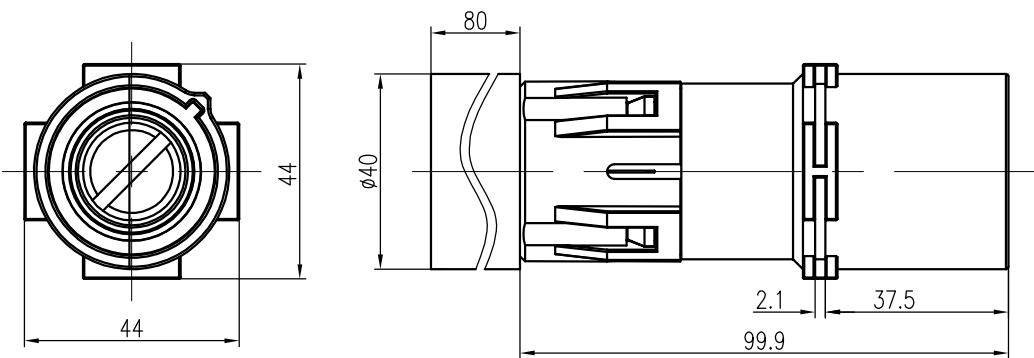


技术参数:
插芯:
- 插针数: 1
- 额定电流:
 · 不带适配器: 650A
- 额定电压:
 · 不带适配器: 2000V
 · 带适配器: 4000V
- 额定脉冲电压:
 · 不带适配器: 12kV
 · 带适配器: 18kV
- 污染等级: 3
- 绝缘阻抗: $>10^{10}\Omega$
- 材料: 聚酰胺
- 颜色: RAL 9002 (灰白色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: >500
插针:
- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 0.3\text{m}\Omega$
- 线径范围: 240mm²
- 最大电缆直径: 32mm
- 压力要求: 130kN
- 工具:
 · 液压钳: TL05
固定框架:
- 材料: 不锈钢
- 外壳固定螺丝的拧紧力矩: 0.5N·m

Technical specification:
Insters:
- No. of contact: 1
- Rated current:
 · Without adapter: 650A
- Rated voltage:
 · Without adapter: 2000V
 · With adapter: 4000V
- Rated impulse voltage:
 · Without adapter: 12kV
 · With adapter: 18kV
- Pollution degree: 3
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polyamide
- Colour: RAL 9002(light white)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500
Contacts:
- Terminal: crimp terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 0.3\text{m}\Omega$
- Wire gauge: 240mm²
- Max. cable diameter: 32mm
- Pressing force requirement: 130kN
- Tools:
 · Manual hydraulic clamp: TL05
Frame:
- Material: stainless steel
- Tightening torque of the fixing screws: 0.5N·m

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	HC650-MC
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.
绘图 Drawn	BQ LUO	15.03.2019	标准化 Stand.	—	—	—	2:3	V1.2	64g	—	1310010100201
审核 Checked	HZ LAN	15.03.2019									产品名称 Part Name
工艺 Process	—	—	批准 Approved	HQ ZHANG	15.03.2019						—
							All Dimensions in mm Original Size DIN A 4			XIAMEN WAIN ELECTRICAL CO.,LTD	

D
C
B
A

D
C
B
A