
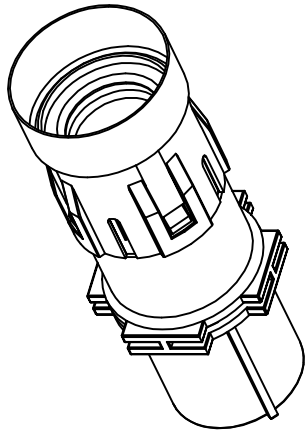


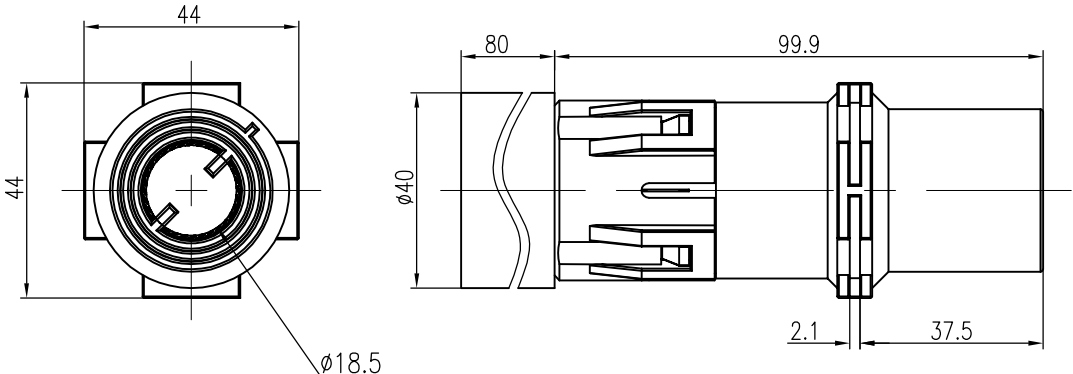

- 技术参数:

插芯:

 - 插针数: 1
 - 额定电流:
 - 不带适配器: 650A
 - 额定电压:
 - 不带适配器: 2000V
 - 带适配器: 4000V
 - 额定脉冲电压:
 - 不带适配器: 12kV
 - 带适配器: 18kV
 - 污染等级: 3
 - 绝缘阻抗: $\geq 10^{10}\Omega$
 - 材料: 聚酰胺
 - 颜色: RAL 9002 (灰白色)
 - 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - 依据UL 94的阻燃等级: V0
 - 可插拔次数: ≥ 500

插针:

 - 接线方式: 冷压连接
 - 材料: 铜合金
 - 表面处理: 镀银
 - 接触电阻: $\leq 0.3\text{m}\Omega$
 - 线径范围: 240mm²
 - 最大电缆直径: 32mm
 - 压力要求: 130kN
 - 工具:
 - 液压钳: TL05

固定框架:

 - 材料: 不锈钢
 - 外壳固定螺丝的拧紧力矩: 0.5N·m
- Technical specification:

Insters:

 - No. of contact: 1
 - Rated current:
 - Without adapter: 650A
 - Rated voltage:
 - Without adapter: 2000V
 - With adapter: 4000V
 - Rated impulse voltage:
 - Without adapter: 12kV
 - With adapter: 18kV
 - Pollution degree: 3
 - Insulation resistance: $\geq 10^{10}\Omega$
 - Material: polyamide
 - Colour: RAL 9002(light white)
 - Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - Flammability acc.to UL 94: V0
 - Mating cycles: ≥ 500

Contacts:

 - Terminal: crimp terminal
 - Material: copper alloy
 - Surface: hard-silver plated
 - Contact resistance: $\leq 0.3\text{m}\Omega$
 - Wire gauge: 240mm²
 - Max. cable diameter: 32mm
 - Pressing force requirement: 130kN
 - Tools:
 - Manual hydraulic clamp: TL05

Frame:

 - Material: stainless steel
 - Tightening torque of the fixing screws: 0.5N·m

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	HC650—FC
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date	产品料号 Part No.			1310010200201
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	BQ LUO	15.03.2019	标准化 Stand.	—	—	2:3	V1.2	61g	—	WAIN 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
审核 Checked	HZ LAN	15.03.2019									
工艺 Process	—	—	批准 Approved	HQ ZHANG	15.03.2019	 		All Dimensions in mm Original Size DIN A 4			