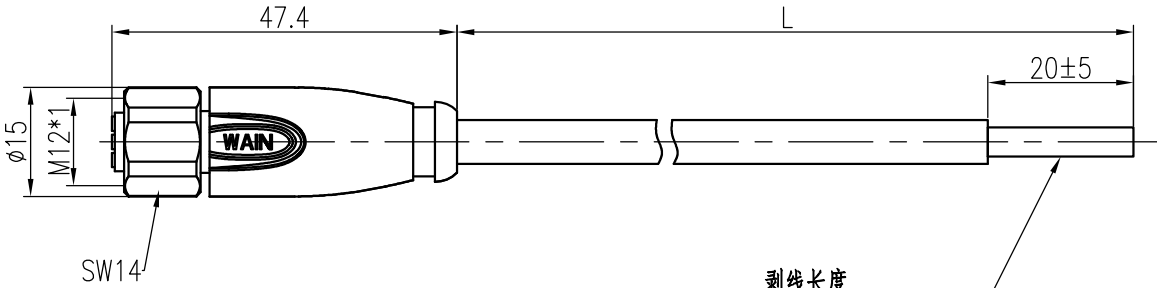





日期/Date		审核/Checking Clerk		1		2		3		4		5		6					
												插针数 Contacts	料号 Order No.	产品代号 Part Code	电缆长度(L) Cable length	重量 Weight			
技术参数: - 产品系列: M12 A-code - 插针数: 3 - 额定电流(40℃): 4 A - 额定电压: 250 V - 脉冲电压: 2500 V - 污染等级: 3 - 接触电阻: ≤10 mΩ - 绝缘电阻: ≥100MΩ - 锁紧方式: 螺纹M12X1 - 电缆类型: PUR, 黑色RAL9005 - 线规: 0.34mm ² (AWG22) - 防护等级: IP67 - 插拔次数: >100 - 使用温度范围: -25℃ - +85℃ - 锁紧螺帽: 不锈钢 - 外壳材料: TPU - 插体材料: PA - 插针材料: 铜合金 - 插针电镀材料: 金												3	1630034024241	M12S-F03A-T-1.5-PUR	1.5m	68g			
													1630034024242	M12S-F03A-T-5.0-PUR	5m	195g			
													-	M12S-F03A-T-L-PUR	Lm	-g			
												剥线长度 Stripping length of the sheath							
Technical specification: - Series: M12 A-code - Number of contacts: 3 - Rated current(40℃): 4 A - Rated voltage: 250 V - Rated impulse voltage: 2500 V - Pollution degree: 3 - Contact resistance: ≤10 mΩ - Insulation resistance: ≥100MΩ - Connectoe locking system: Screw M12x1 - Cable type: PUR , Black RAL 9005 - Wire gauge: 0.34mm ² (AWG22) - Degree of protection: IP67 - Mating cycles: >100 - Temperature range: -25℃ - +85℃ - Material of locking system: Stainless steel - Material of housing: TPU - Material of Insert: PA - Material of contact: copper alloy - Contact plating: Au												针位图 Contact arrangements				接线图 Circuit diagram			
																			
例如型号"M12S-F03A-T-L-PUR", "L"表示带线长度, 单位m.																			
Ex: Part code "M12S-F03A-T-L-PUR",the "L" represents the cable length, unit m.																			
标记 Mark		处数 Number		变更描述/Description		签名 Signature		日期 Date		表面处理 Finish		图号 Drawing No.		-					
										材料 Material		产品代号 Part Code		M12S-F03A-T-L-PUR					
												产品料号 Part No.		-					
												产品名称 Part Name		-					
绘图 Drawn		L CHEN		18.12.2023		标准化 Stand.		-		比例 Scale		版本 REV.		重量 Weight					
审核 Checked		ZQ XU		18.12.2023						1:1		V1.1		-g					
工艺 Process		-		-		批准 Approved		HQ ZHANG		18.12.2023		All Dimensions in mm Original Size DIN A 4		-					
														厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD					