


日期/Date
Filing Clerk
造来员

技术参数:


- 产品系列: M12 A-code
- 插针数: 3
- 额定电流(40℃): 4 A
- 额定电压: 250 V
- 脉冲电压: 2500 V
- 污染等级: 3
- 接触电阻: $\leq 10\text{ m}\Omega$
- 绝缘电阻: $\geq 100\text{ M}\Omega$
- 锁紧方式: 螺纹M12X1
- 电缆类型: PVC, 黑色RAL9005
- 线规: 0.34 mm^2 (AWG22)
- 防护等级: IP67
- 插拔次数: >100
- 使用温度范围: $-25^\circ\text{C} - +85^\circ\text{C}$
- 外壳材料: TPU
- 插体材料: PA
- 插针材料: 铜合金
- 插针电镀材料: 金

Technical specification:

- Series: M12 A-code
- Number of contacts: 3
- Rated current(40℃): 4 A
- Rated voltage: 250 V
- Rated impulse voltage: 2500 V
- Pollution degree: 3
- Contact resistance: $\leq 10\text{ m}\Omega$
- Insulation resistance: $\geq 100\text{ M}\Omega$
- Connectoe locking system: Screw M12x1
- Cable type: PVC , Black RAL 9005
- Wire gauge: 0.34 mm^2 (AWG22)
- Degree of protection: IP67
- Mating cycles: >100
- Temperature range: $-25^\circ\text{C} - +85^\circ\text{C}$
- Material of housing: TPU
- Material of Insert: PA
- Material of contact: copper alloy
- Contact plating: Au

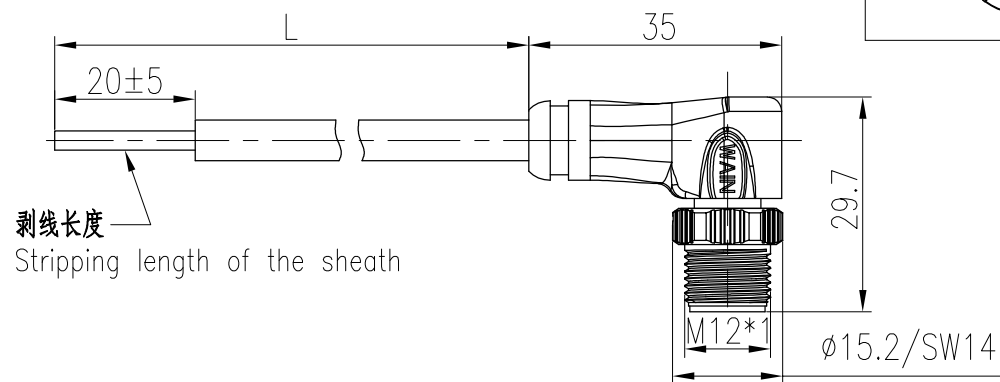

针位图
Contact arrangements

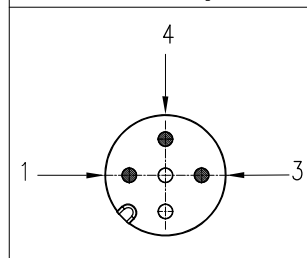

接线图
Circuit diagram



例如型号 "M12-M03A-S-L-PVC-SH",

"L"表示带线长度, 单位m.

Ex: Part code "M12-M03A-S-L-PVC-SH",
the "L" represents the cable length, unit m.

-	M12-M03A-S-L-PVC-SH	Lm	-g
1630035014022	M12-M03A-S-5.0-PVC-SH	5.0m	198g
1630035014021	M12-M03A-S-1.5-PVC-SH	1.5m	71g
产品料号 Part NO.	产品代号 Part Code	线缆长度(L)	重量Weight

						表面处理 Finish		—		图号 Drawing No.	—	
						材料 Material		—		产品代号 Part Code	M12-M03A-S-L-PVC-SH	
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	—	
		姓名/Name	日期/Date			姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	
绘图 Drawn	L CHEN		21.12.2023	标准化 Stand.	—		—				产品名称 Part Name	—
审核 Checked	ZQ XU		21.12.2023				1:1		V1.1	—	—	
工艺 Process	—		—	批准 Approved	HQ ZHANG	21.12.2023					All Dimensions in mm Original Size DIN A 4	
												厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD