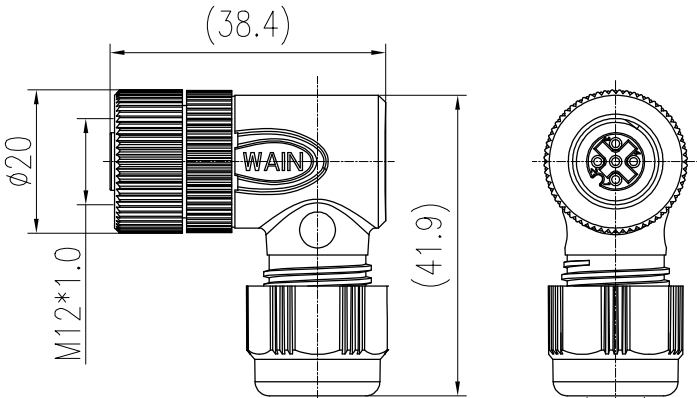












日期/Date		档案员 Filing Clerk		1		2		3		4		5		6																																								
 针位排布图 Contact arrangement <table><tr><td>3-pole</td><td>4-pole</td><td>5-pole</td></tr><tr><td></td><td></td><td></td></tr></table>  <table><tr><td>插针数 Contacts</td><td>电缆出口直径φ Cable outlet</td><td>产品料号 Part No.</td><td>型号 Part Code</td><td>重量 Weight</td></tr><tr><td rowspan="2">3</td><td>4-6 mm</td><td>1630035233500</td><td>M12-FST03A-S-D6</td><td>-g</td></tr><tr><td>6-8 mm</td><td>1630035233503</td><td>M12-FST03A-S-D8</td><td>-g</td></tr><tr><td rowspan="2">4</td><td>4-6 mm</td><td>1630045233502</td><td>M12-FST04A-S-D6</td><td>-g</td></tr><tr><td>6-8 mm</td><td>1630045233503</td><td>M12-FST04A-S-D8</td><td>-g</td></tr><tr><td rowspan="2">5</td><td>4-6 mm</td><td>1630055233502</td><td>M12-FST05A-S-D6</td><td>-g</td></tr><tr><td>6-8 mm</td><td>1630055233503</td><td>M12-FST05A-S-D8</td><td>-g</td></tr></table> 技术参数: - 产品系列: M12-A 编码 - 插针数: 3 4 5 - 额定电流(40℃): 4A 4A 4A - 额定电压: 250V 250V 125V - 额定脉冲电压: 2500V 2500V 1500V - 污染等级: 3 - 接触电阻: <10mΩ - 防护等级: IP67 - 插拔次数: >100 - 温度范围: -40℃...+85℃ - 绝缘阻抗: >100MΩ - 接线方式: 焊接 - 线径范围: max.0.75mm² (max.AWG18) - 电缆直径: 4-6mm, 6-8mm 材料特性: - 锁紧螺母: 金属 - 插针材料: 铜合金 - 插针表面处理: 镀金 - 外壳材料: PA - 绝缘材料: PA 符合标准: IEC 61076-2-101 Technical specification: - Series: M12 A-Code - Number of contacts: 3 4 5 - Rated current(40℃): 4A 4A 4A - Rated voltage: 250V 250V 125V - Rated impulse voltage: 2500V 2500V 1500V - Pollution degree: 3 - Contact resistance: <10mΩ - Degree of protection: IP67 - Mating cycles: >100 - Temperature range: -40℃ - +85℃ - Insulation resistance: >100MΩ - Termination method: solder - Wire gauge: max.0.75mm² (max.AWG18) - Cable Outlet: 4-6mm, 6-8mm Material properties : - Material of locking system: Metal - Material of contact: copper alloy - Contact plating: Au - Material of housing : PA - Material of Insert: PA Standards: IEC 61076-2-101										3-pole	4-pole	5-pole				插针数 Contacts	电缆出口直径φ Cable outlet	产品料号 Part No.	型号 Part Code	重量 Weight	3	4-6 mm	1630035233500	M12-FST03A-S-D6	-g	6-8 mm	1630035233503	M12-FST03A-S-D8	-g	4	4-6 mm	1630045233502	M12-FST04A-S-D6	-g	6-8 mm	1630045233503	M12-FST04A-S-D8	-g	5	4-6 mm	1630055233502	M12-FST05A-S-D6	-g	6-8 mm	1630055233503	M12-FST05A-S-D8	-g	表面处理 Finish		—		图号 Drawing No.	—	
										3-pole	4-pole	5-pole																																										
																																																						
										插针数 Contacts	电缆出口直径φ Cable outlet	产品料号 Part No.	型号 Part Code	重量 Weight																																								
										3	4-6 mm	1630035233500	M12-FST03A-S-D6	-g																																								
6-8 mm	1630035233503	M12-FST03A-S-D8	-g																																																			
4	4-6 mm	1630045233502	M12-FST04A-S-D6	-g																																																		
	6-8 mm	1630045233503	M12-FST04A-S-D8	-g																																																		
5	4-6 mm	1630055233502	M12-FST05A-S-D6	-g																																																		
	6-8 mm	1630055233503	M12-FST05A-S-D8	-g																																																		
材料 Material		—		产品代号 Part Code	M12-FST0xA-S-Dxx																																																	
比例 Scale		版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.	—																																																
1:1		V1.0	-g	—	产品名称 Part Name	—																																																
All Dimensions in mm Original Size DIN A 4		厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD																																																				