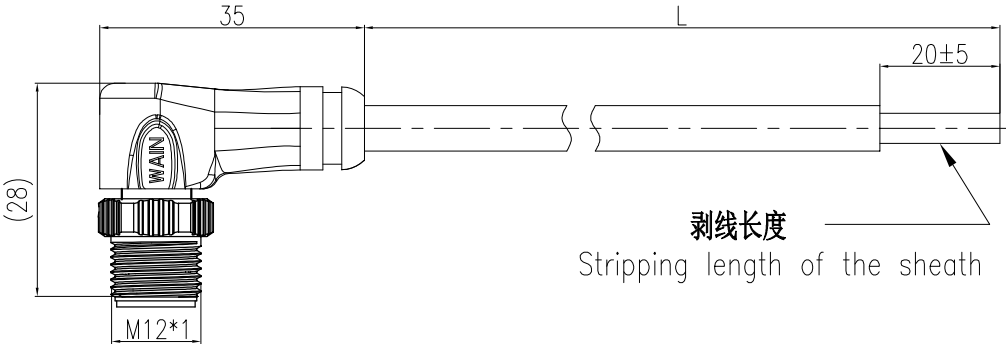


技术参数:

- 产品系列: M12 A-code
- 插针数: 4
- 额定电流 (40℃): 4 A
- 额定电压: 250 V
- 脉冲电压: 2500 V
- 污染等级: 3
- 接触电阻: ≤10 mΩ
- 绝缘电阻: ≥100MΩ
- 锁紧方式: 螺纹M12X1
- 电缆类型: PUR, 黑色RAL9005
- 线规: 0.34mm² (AWG22)
- 防护等级: IP67
- 插拔次数: >100
- 使用温度范围: -25℃ - +85℃
- 锁紧螺帽: 不锈钢
- 外壳材料: TPU
- 插体材料: PA
- 插针材料: 铜合金
- 插针电镀材料: 金





剥线长度
Stripping length of the sheath

Technical specification:

- Series: M12 A-code
- Number of contacts: 4
- Rated current(40℃): 4 A
- Rated voltage: 250 V
- Rated impulse voltage: 2500 V
- Pollution degree: 3
- Contact resistance: ≤10 mΩ
- Insulation resistance: ≥100MΩ
- Connectoe locking system: Screw M12x1
- Cable type: PUR , Black RAL 9005
- Wire gauge: 0.34mm² (AWG22)
- Degree of protection: IP67
- Mating cycles: >100
- Temperature range: -25℃ - +85℃
- Material of locking system: Stainless steel
- Material of housing: TPU
- Material of Insert: PA
- Material of contact: copper alloy
- Contact plating: Au

例如型号”M12S-M04A-S-L-PUR”,
”L”表示带线长度, 单位m。

Ex: Part code ”M12S-M04A-S-L-PUR”,the
”L” represents the cable length, unit m.

针位图 Contact arrangements				接线图 Circuit diagram	
					
表面处理 Finish		—		图号 Drawing No.	—
材料 Material		—		产品代号 Part Code	M12S-M04A-S-1.5-PUR
比例 Scale		版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.
1:1		V1.1	68.6g	—	1630045014241
				产品名称 Part Name	—
				 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
		All Dimensions in mm Original Size DIN A 4			

标记 Mark	处数 Number	变更描述/Description		签名 Signature	日期 Date
绘图 Drawn	ZM LIN	15.03.2015	标准化 Stand.	—	—
审核 Checked	YY LUO	15.03.2015			
工艺 Process	—	—	批准 Approved	YY LUO	15.03.2015