

日期/Date

档案员
Filing Clerk

1

2


3

4

5

6


插针数 Contacts	料号 Order No.	产品代号 Part Code	电缆直径(D) Cable outlet	重量 Weight
4	1630045113201	M12S-M04A-S-D6	4-6mm	24.8g
	1630045113202	M12S-M04A-S-D8	6-8mm	24.6g
5	1630055113201	M12S-M05A-S-D6	4-6mm	26.6g
	1630055113202	M12S-M05A-S-D8	6-8mm	26.4g

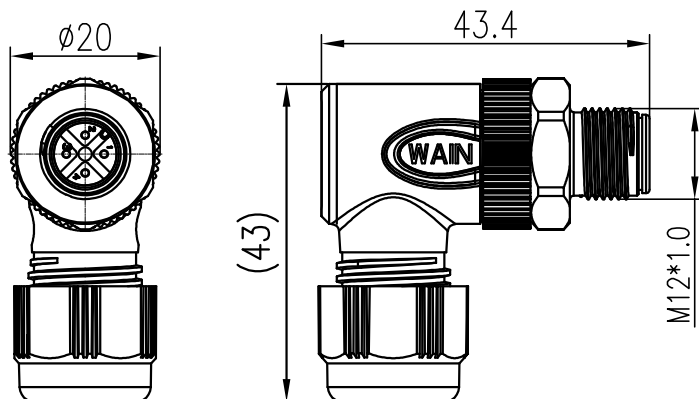电缆直径:D6,D8
Cable outlet:D6,D8

针位排布图

Contact arrangement

5-pole	4-pole

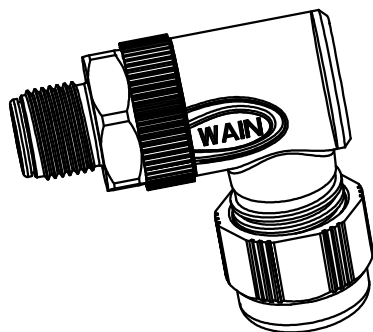

技术参数:

- 产品系列: M12-A 编码

- | | | |
|--------------|-------------------------------------|-------|
| - 插针数: | 4 | 5 |
| - 额定电流(40℃): | 4A | 4A |
| - 额定电压: | 250V | 125V |
| - 额定脉冲电压: | 2500V | 1500V |
| - 污染等级: | 3 | |
| - 接触电阻: | ≤10mΩ | |
| - 防护等级: | IP67 | |
| - 插拔次数: | >100 | |
| - 温度范围: | -40℃~+85℃ | |
| - 绝缘阻抗: | ≥100MΩ | |
| - 接线方式: | 螺钉锁紧 | |
| - 线径范围: | max.0.75mm ² (max.AWG18) | |
| - 锁紧扭矩: | 0.2Nm (螺钉接线) | |
| - 电缆直径: | 4-6mm, 6-8mm | |
| - 电缆剥线长度: | 20mm | |
| - 导线剥线长度: | 5mm | |

材料特性:

- 锁紧螺帽: 不锈钢
- 插针材料: 铜合金
- 插针表面处理: 镀金
- 外壳材料: PA
- 颜色: RAL 9005 (黑色)
- 绝缘材料: PA

Technical specification:

- Series: M12 A-Code
- Number of contacts: 4 5
- Rated current(40℃): 4A 4A
- Rated voltage: 250V 125V
- Rated impulse voltage: 2500V 1500V
- Pollution degree: 3
- Contact resistance: ≤10mΩ
- Degree of protection: IP67
- Mating cycles: >100
- Temperature range: -40℃ - +85℃
- Insulation resistance: ≥100MΩ
- Termination method: screw connection
- Wire gauge: max.0.75mm² (max.AWG18)
- Torque: 0.2Nm (screw terminal blocks)
- Cable Outlet: 4~6mm, 6~8mm
- Stripping length of the sheath: 20mm
- Stripping length of the individual wire: 5mm

Material properties:

- Material of locking system: Stainless steel
- Material of contact: copper alloy
- Contact plating: Au
- Material of housing: PA
- Colour of housing: RAL 9005 (Black)
- Material of Insert: PA

符合标准: IEC 61076-2-101

Standards: IEC 61076-2-101

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	M12S—M0xA—T—Dx
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	—
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	ZM LIN	26.11.2015	标准化 Stand.	—	—	1:1	V1.0	—	—		
审核 Checked	YY LUO	26.11.2015									
工艺 Process	—	—	批准 Approved	YY LUO	26.11.2015			All Dimensions in mm Original Size DIN A 4			 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD