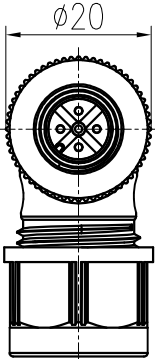
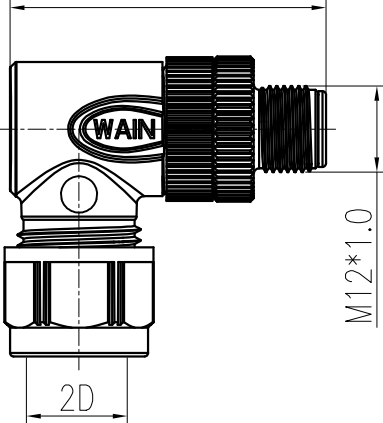


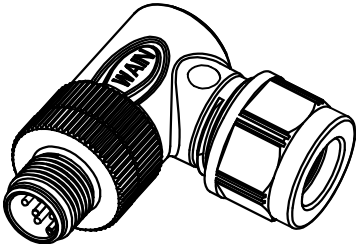






日期/Date		档案员 Filing Clerk		1		2		3		4		5		6									
										插针数 Contacts		电缆出口直径φ Cable outlet		产品料号 Part No.		型号 Part Code		重量 Weight					
  电缆直径:2D5 Cable outlet:2D5 针位排布图 Contact arrangement <table><tr><td>4-pole</td><td>5-pole</td></tr><tr><td></td><td></td></tr></table> 										4-pole	5-pole			4		2.1-3 mm 4-5 mm		1630045133506		M12P-MST04A-S-2D5		-g -g	
										4-pole	5-pole												
																							
										5		2.1-3 mm 4-5 mm		1630055133506		M12P-MST05A-S-2D5		-g -g					
技术参数: - 产品系列: M12-A 编码 - 插针数: 4 5 - 额定电流(40℃): 4A 4A - 额定电压: 250V 125V - 额定脉冲电压: 2500V 1500V - 污染等级: 3 - 接触电阻: <10mΩ - 防护等级: IP67 - 插拔次数: >100 - 温度范围: -40℃...+85℃ - 绝缘阻抗: >100MΩ - 接线方式: 焊接 - 线径范围: max.0.75mm² (max.AWG18) - 电缆直径: 2 (2.1-3mm or 4-5mm) 材料特性: - 锁紧螺帽: 塑料 - 插针材料: 铜合金 - 插针表面处理: 镀金 - 外壳材料: PA - 绝缘材料: PA 符合标准: IEC 61076-2-101 Technical specification: - Series: M12 A-Code - Number of contacts: 4 5 - Rated current(40℃): 4A 4A - Rated voltage: 250V 125V - Rated impulse voltage: 2500V 1500V - Pollution degree: 3 - Contact resistance: <10mΩ - Degree of protection: IP67 - Mating cycles: >100 - Temperature range: -40℃ - +85℃ - Insulation resistance: >100MΩ - Termination method: solder - Wire gauge: max.0.75mm² (max.AWG18) - Cable Outlet: 2 (2.1-3mm or 4-5mm) Material properties : - Material of locking system: plastic - Material of contact: copper alloy - Contact plating: Au - Material of housing : PA - Material of Insert: PA Standards: IEC 61076-2-101																							