
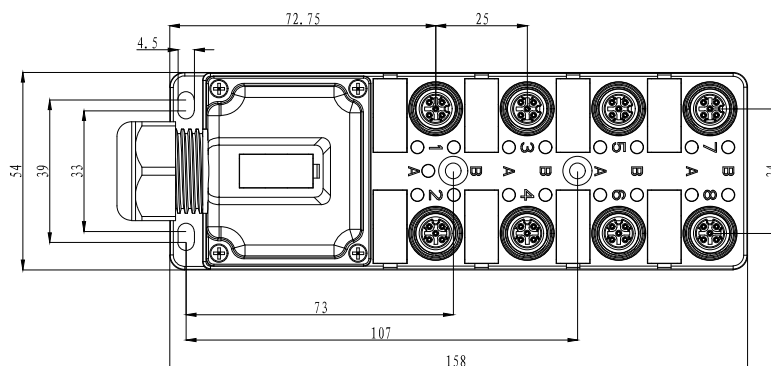
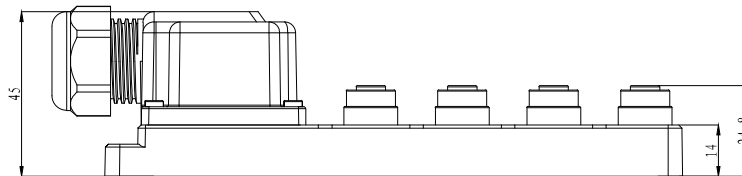


PNP回路

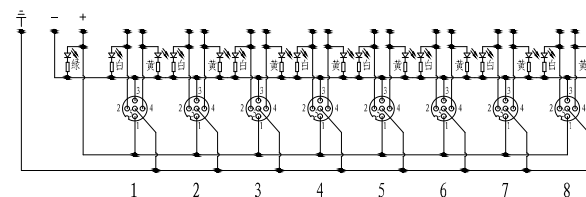

技术参数:

- 额定电流 (40℃): 总线10A 分线2A
- 额定电压: 24V 30V(MAX)
- 污染等级: 3
- 接触电阻: $\leq 10\text{m}\Omega$
- 插拔次数: > 100
- 出线方式: M12 x 1
- 进线方式: 电缆线
- 电缆出线口直径: $\varnothing 6-12\text{mm}$
- 温度范围: $-25^{\circ}\text{C} - +80^{\circ}\text{C}$
- 防护等级: IP67
- 外壳材料: 锌合金
- 绝缘材料: PA

Technical specification:

- Rated current (40℃): (principal line) 10A (splitter) 2A
- Rated voltage: 24V 30V(MAX)
- Pollution degree: 3
- Contact resistance: $\leq 10\text{m}\Omega$
- Mating cycles: > 100
- Entry cable: M12 x 1
- Incoming mode: electric cable
- Cable Outlet: $\varnothing 6-12\text{mm}$
- Temperature range: $-25^{\circ}\text{C} - +80^{\circ}\text{C}$
- Degree of protectio: IP67
- Material of housing : Zinc
- Material of insert: PA

						表面处理 Finish	—	图号 Drawing No.	—
						材料 Material	—	产品代号 Part Code	SJB-M12-8F05A-D12.5
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date	比例 Scale	版本 REV.	重量 Weight
绘图 Drawn	YL CHEN	18.05.2023	标准化 Stand.	—	—	—	1:2	V1.0	300g
审核 Checked	QZ XU	18.05.2023	—	—	—	—	—	—	—
工艺 Process	—	—	批准 Approved	HQ ZHANG	18.05.2023	—	—	—	—
							数量 Qty.	—	—
							All Dimensions in mm Original Size DIN A 4		
							厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		