

技术参数:

- 产品系列: MR23
- 插针数: 9
- 插针直径(mm) : 8* ϕ 1+1* ϕ 2
- 接线范围(mm²) : 0.03-1.0 + 0.35-2.5
- 接线方式: 冷压连接
- 额定电流(25℃): 10A
- 额定电压: 160V
- 额定脉冲电压: 2.5KV
- 过电压保护等级: III
- 污染等级: 3
- 插针需单独订购.

机械参数:

- 外壳材质: 铜合金, 锌合金
- 外壳表面处理: 镀镍
- 插芯材质: PBT
- 密封材质: 氟橡胶
- 温度范围: -40℃...+130℃
- 电缆直径: 4.5-14.5mm 屏蔽
- 插拔次数: >500
- 防护等级: IP67

Technical specification:


- Series: MR23
- Number of contacts: 9
- Contact diameter(mm): 8* ϕ 1+1* ϕ 2
- Wire gauge(mm²): 0.03-1.0 + 0.35-2.5
- Terminal: Crimp
- Rated current(25℃): 10A
- Rated voltage: 160V
- Rated impulse voltage: 2.5KV
- Overvoltage category: III
- Pollution degree: 3

Mechanical specification:

- Material of housing: CuZn,Zinc(GD-Zn)
- Finish of housing:Nickel-plated
- Material of Insert:PBT
- Material of sealing:FPM
- Temperature range: -40℃...+130℃
- Cable Outlet: 4.5-14.5mm Shielded
- Mating cycles: >500
- Degree of protection: IP67
- Contact need to be ordered separately.


插针数 Contacts	电缆出口直径 ϕ Cable outlet	产品料号 Cable outlet	型号 Part Code	重量 Weight
9	4.5-8 mm	1810097002515	MR23-009R-CCT/R-D8-SH	97g
	6-10 mm	1810097002516	MR23-009R-CCT/R-D10-SH	96.4g
	9-14.5 mm	1810097002517	MR23-009R-CCT/R-D14.5-SH	94.9

面板开孔图

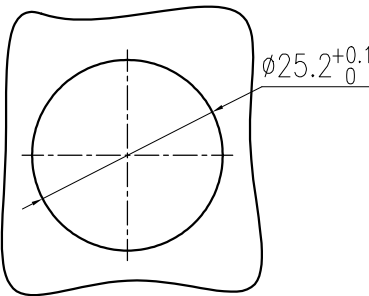


针位排布图

Contact arrangement

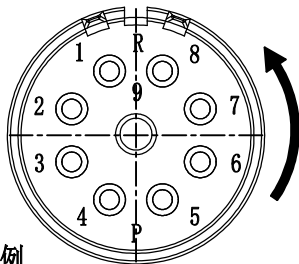

比例

Scale: 2:1

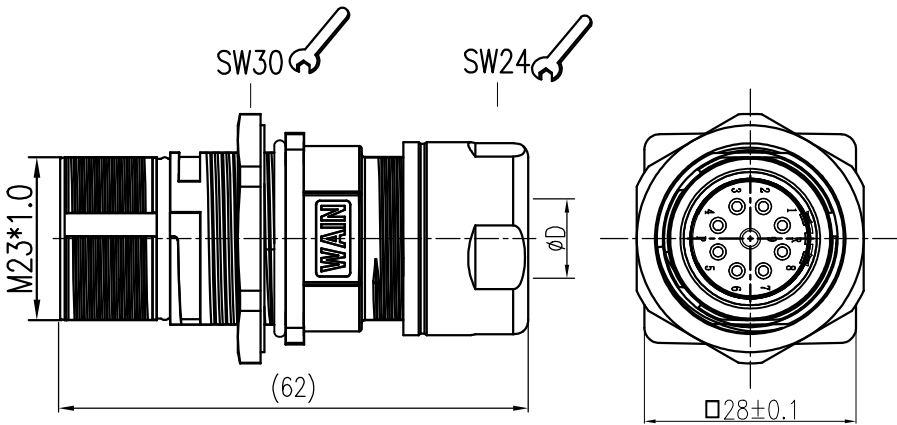

						表面处理 Finish	—				图号 Drawing No.	—	
						材料 Material	—				产品代号 Part Code	MR23-009R-CCT/R-DXX-SH	
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date					产品料号 Part No.	—	
绘图 Drawn	姓名/Name		日期/Date	标准化 Stand	姓名/Name		日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
	JS WU		04.11.2022		—		—	1:1	V1.0	—	—	—	
审核 Checked	ZQ XU		04.11.2022										
工艺 Process	—		—	批准 Approved	HQ ZHANG	04.11.2022	 		All Dimensions in mm Original Size DIN A 4				 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD