

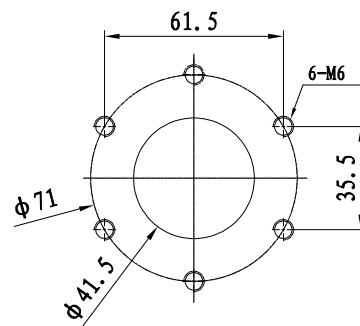
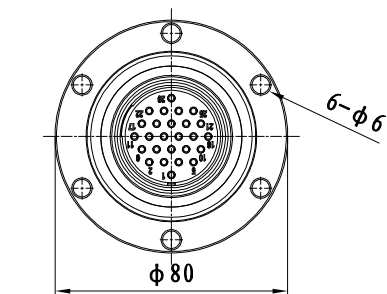


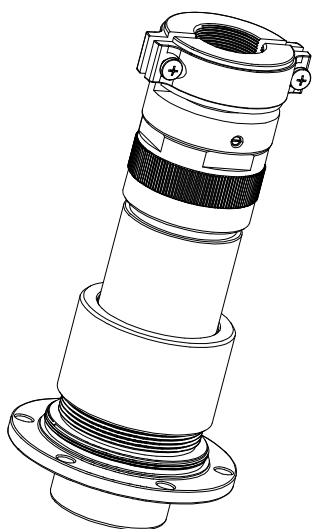

面板安装尺寸
Panel Cut-out

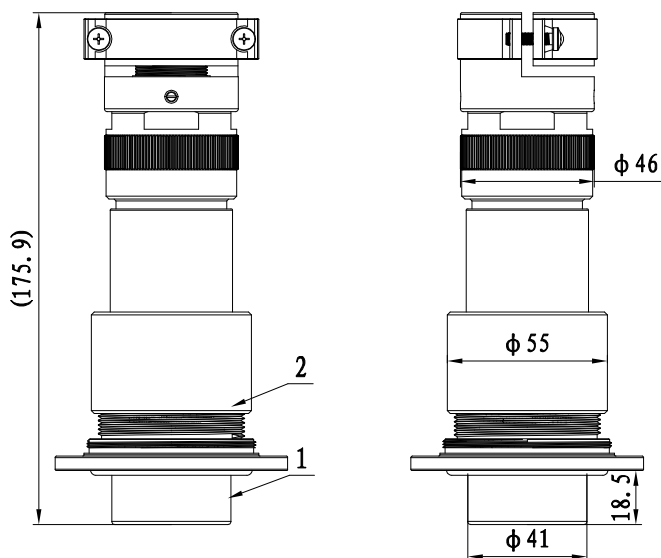


技术参数:

- 插针数: 26
- 额定电流: 20A
- 工作电压: 250V (AC)
- 耐电压: 2.0KV
- 绝缘电阻: $>2000M\Omega$ (常态下)
- 接触电阻: $<2m\Omega$
- 焊线规格: 焊线筒直径 $\phi 1.8mm$
- 外壳材料: 铜合金镀镍
- 插针材料: 铜合金镀金
- 绝缘件: 热固性材料
- 密封件: 硅橡胶、氟胶
- 振动: $10\sim 2000Hz$, $147m/s^2$, 瞬断 $<1us$
- 冲击: 加速度峰值 $490m/s^2$, 瞬断 $<1us$
- 机械寿命: >500
- 锁定方式: 螺纹锁定
- 线缆出线口直径: 双出线口 $2\times 12mm$
- 相对湿度: $90\%\sim 95\%$ ($40^\circ C \pm 2^\circ C$ 时)
- 工作温度: $-40^\circ C \dots +105^\circ C$
- 防护等级: IP65

Technical specification:

- Number of contacts: 26
- Rated current: 20A
- Rated voltage: 250V (AC)
- Rated impulse voltage: 2.0KV
- Insulation resistance: $>2000\text{ M}\Omega$ (normal temperature)
- Contact resistance: $<2\text{m}\Omega$
- Welding wire: Diameter $\phi 1.8\text{mm}$
- Material of housing: The copper alloy plating nickel
- Material of contact: Gold-plated copper alloy
- Material of insert: Thermosets
- Sealing element: Silicone rubber, FKM
- Vibration: Frequency $10\sim 2000\text{Hz}$, accelerated speed 147m/s^2 , instant break $<1\text{s}$
- Shock: Accelerated speed 490m/s^2 , instant break $<1\text{s}$
- Mating cycles: >500
- Connector locking system: Thread locking
- Cable and outlet diameter: Double outlet $2\times 12\text{mm}$
- Relative humidity: 90%~95% ($40^\circ\text{C}\pm 2^\circ\text{C}$)
- Working temperature: $-40^\circ\text{C}\sim +105^\circ\text{C}$
- Pollution degree: IP65

2	1690264231001	HY-T4126-S01E2/12-GF			1	
1	1690263131001	HY-Z4126-S01E0-GM			1	
序号/No.	零件料号/Part No.	零件名称/Part Name	材料/Material	规格/Specification	数量/Qty.	备注/Remark
			产品代号 Part Code	HDC-HYZT4126E0E1GM/GF	图号 Drawing No.	-
			比例 Scale	版本 REV.	重量 Weight	数量 Qty.
标记 Mark	处数 Number	变更描述/Description	签名 Signature	日期 Date	产品料号 Part No.	7000000002973
	姓名/Name	日期/Date	姓名/Name	日期/Date	1:1	V1.0
绘图 Drawn	YP ZHU	09. 04. 2024	标准化 Stand.	-	-	-
审核 Checked	Q GAO	09. 04. 2024				
工艺 Process	-	-	批准 Approved	HQ ZHANG	09. 04. 2024	
						
				All Dimensions in mm Original Size DIN A4		
				 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO. LTD		