

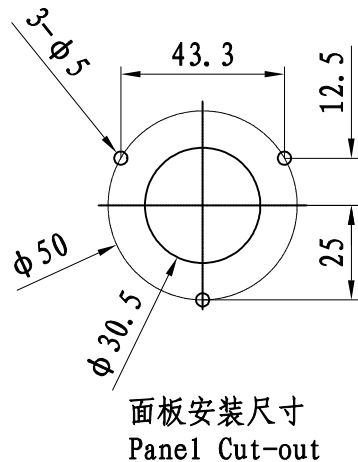
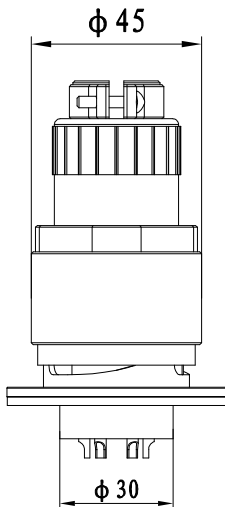


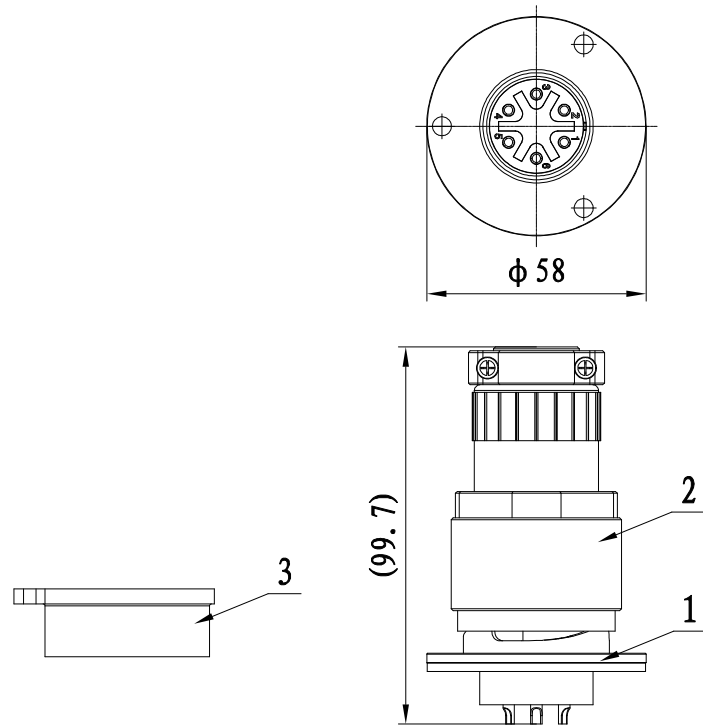

- 技术参数:
- 插针数: 6 (防开路)
 - 额定电流: 40A
 - 工作电压: 250V (AC)
 - 耐电压: 2.0KV
 - 绝缘电阻: >2000MΩ (常态下)
 - 接触电阻: <1mΩ
 - 外壳材料: 铜合金镀镍
 - 插针材料: 铜合金镀金
 - 绝缘件: PA
 - 密封件: 硅橡胶、氟胶
 - 振动: 10-2000Hz, 147m/s², 瞬断<1us
 - 冲击: 加速度峰值490m/s², 瞬断<1us
 - 机械寿命: >500
 - 锁定方式: 卡口锁定
 - 线缆出线口直径: φ13mm
 - 相对湿度: 90%-95% (40℃±2℃时)
 - 工作温度: -40℃...+105℃
 - 防护等级: IP65
- Technical specification:
- Number of contacts: 6 (The open circuit)
 - Rated current: 40A
 - Rated voltage: 250V (AC)
 - Rated impulse voltage: 2.0KV
 - Insulation resistance: >2000 MΩ (normal temperature)
 - Contact resistance: <1mΩ
 - Material of housing: The copper alloy plating nickel
 - Material of contact: Gold-plated copper alloy
 - Material of insert: PA
 - Sealing element: Silicone rubber, FKM
 - Vibration: Frequency10~2000Hz, accelerated speed147m/s², instant break<1us
 - Shock: Accelerated speed 490m/s², instant break<1us
 - Mating cycles: >500
 - Connector locking system: Bayonet locking
 - Cable and outlet diameter: 10.5mm
 - Relative humidity: 90%-95% (40℃±2℃)
 - Working temperature: -40℃--+105℃
 - Pollution degree: IP65

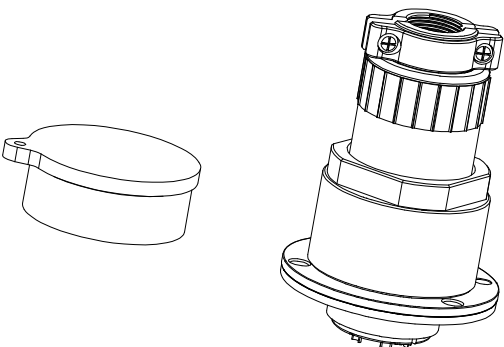

3	2690000009002	HY-Z30-CV			1	用于公插/for male
2	1690064231001	HY-PT3006-S01E1-GF			1	
1	1690063131001	HY-PZ3006-S01E0-GM			1	
序号/No. 零件料号/Part No.		零件名称/Part Name	材料/Material	规格/Specification	数量/Qty.	备注/Remark
			产品代号 Part Code	HDC-HYPZ3006B0E1GM/GF -Z30CV	图号 Drawing No.	-
			比例 Scale	版本 REV.	重量 Weight	数量 Qty.
标记 Mark	处数 Number	变更描述/Description	签名 Signature	日期 Date	产品料号 Part No.	7000000002971
	姓名/Name	日期/Date	姓名/Name	日期/Date	组件名称 Module Name	HDC-HYPZ3006B0E1GM/GF-Z30CV, 6芯圆形防开路成品套件
绘图 Drawn	YP ZHU	09. 04. 2024	标准化 Stand.	-		
审核 Checked	Q GAO	09. 04. 2024				
工艺 Process	-	-	批准 Approved	HQ ZHANG	09. 04. 2024	
				All Dimensions in mm Original Size DIN A4		
				厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		