

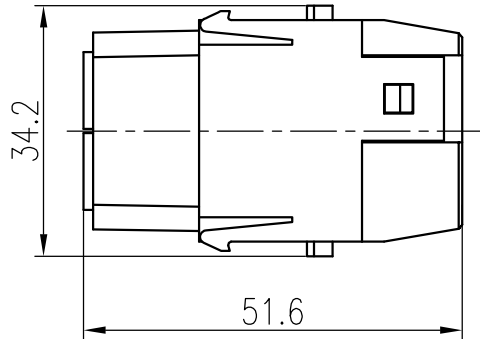


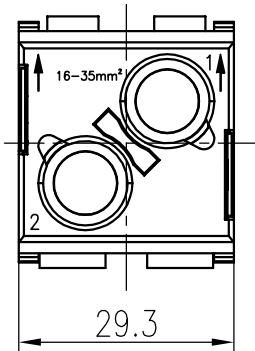

技术参数:
插芯:
- 插针数: 2
- 额定电流: 100A
- 额定电压: 1000V
- 额定脉冲电压: 8kV
- 污染等级: 3
- 依据UL的额定电压: 600V
- 绝缘阻抗: $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: >500
插针:
- 接线方式: 轴向螺栓连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 0.3\text{m}\Omega$
- 线径范围: 16-35mm²
- 内角扳手: SW-4*150
- 剥线长度: 16mm
- 拧紧力矩:
· mm²: 25 35 50 70
· N·m: 8 8 9 10

Technical specification:
Insters:
- No. of contact: 1
- Rated current: 100A
- Rated voltage: 1000V
- Rated impulse voltage: 8kV
- Pollution degree: 3
- Rated voltage acc.to UL: 600V
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500
Contacts:
- Terminal: axial screw terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 0.3\text{m}\Omega$
- Wire gauge: 16-35mm²
- Hexagonal driver: SW-4*150
- Stripping length: 16mm
- Tightening torque:
· mm²: 25 35 50 70
· N·m: 8 8 9 10



						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	H2MK-002.2-F
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date			产品料号 Part No.		1290020210102
绘图 Drawn	姓名/Name	日期/Date	标准化 Stand.	姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
	YL GAO	16.11.2023		—	—	1:1	V1.1	71.3g	—		
审核 Checked	Q GAO	16.11.2023									
工艺 Process	—	—	批准 Approved	HQ ZHANG	16.11.2023			All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	